SOKKIA

MADE IN U.S.A.

SOKKIA T14NR1E

MINING TRANSIT BOOK

No. 8152-20

PNT # 604-699

How many shots? 5ht for 5min.
What is included in sckeck?
How many calls? 4
Radio channel?
Do we create a new job? T14NR1E
Pictures

#57 Was easy to get to with truck
#44 is off Road will get later
#39 could not Find No tie Sheets
#58 Gone Due to Gravel pit expan.
#43 Need Ties Sheet to Find.
#29 IN Road Need to come Back.
#22 could not find
#14 wrong tie sheet
#76 off Road Need to go Back
#121 GATE Need access

RYAN
Kevin
7-29-10

T14N R1E
Sec Cor
TIES

637 638

TC Rich Hi = 4.80

shot pnts

TC Lewi Hi = 5.06

✓ Rich

shot

No shots taken wrong ant.

Bags N ∈ 2

N 3884809.677

E 1559313.403

(Lewi)

N 3879141.659

E 1544121.402

EL = 4505.087

E 1/4 cor sec 23
W 1/4 cor sec 24 #18
41°56'24.854"
111°47'50.199"

(Wall)

41°44'04.98133" N.

111°50'06.87305" W

EL = 4489.451

N. 3791600.393

E 1548914.613

EL = 4540.356

Rod Hi with mantle 1.74 ET

2651.37

637

638

Ryan
Kevin

8-2-2010

T14N R1E
sec Cor
TIES

TQ Rich Hi = 4.67

✓ Lewi .168 ft off

SHOT #665

NW Cor. Sec. 6 T14N R1E Found Mag Nail that Fit 2 of The 3 ties. FIRE Hyd. Has Been moved NEW Distance IS 75 FT 3rd tie IS a House Cor Could Not SHot with GPS. Tied down TBar Fence Cor in NW. Quad at The Intersection.

8-4-2010 SET 2in Rebar with a 2 in alum.

PIC # Cap.

111

#100700 ✓

Pla—

Kevin

8-3-2010

T14N R1E

SecTIES

TC@ Richl Vlew, Hl. 491

Shot:

(NQ sec 11) #661

N 1/4 section 11 S. 1/4 section 2. Found 2" alum. Cap #540600 ✓ .4 ft below Road surface. WP #1 is Nail & Flash on west side of RR TIE 16.28 FT East of monument. WP2 T Bar Post 75.62 FT SW of monument. WP 3 T Bar. post 101.72 FT NW of monument.

(WQ Sec 14) #662

W 1/4 sec 14 E 1/4 sec 15. Found 3" alum. Cap in #500440 ✓ Fence Cor Running N+S+E. WP 1 3 IN steel post IN Feed corral E+W and Fence. South 136.27 FT. S.W. OF monument. WP#2 IS wood post 161.13 FT south of monument. WP #3 IS RR TIE 20.76 FT North of monument.

(SE cor 36 sec) #663

South East corner Section 36. Found 3 IN. Brass Cap #700100 ✓ in Fence Corner South + west with mound of stones. WP #1 is a RR TIE 16 FT south of monument. WP #2 IS Large Rock 10.16 FT N.W. monument. WP #3 IS RR TIE 7 FT West of monument.

Ryan
Kevin

8-4-2010

T 14 N R 1 E

Sec. Ties

637 638

T@ Rich Level H.I. = 5.09

~~Shot~~

(NE Sec 36) #664


~~Pic #~~

108

#700200

North East corner of section 36. Found 3 in. Brass Cap 1.36 Ft S.E. Round wood ~~post~~ Shot post as WP #1. WP#2 is a Broken wood post 12.22 Ft South of monument. WP#3 is a broken post 97.52 Ft east of monument.

North 1/4 Corner Section 6 T14N R1E

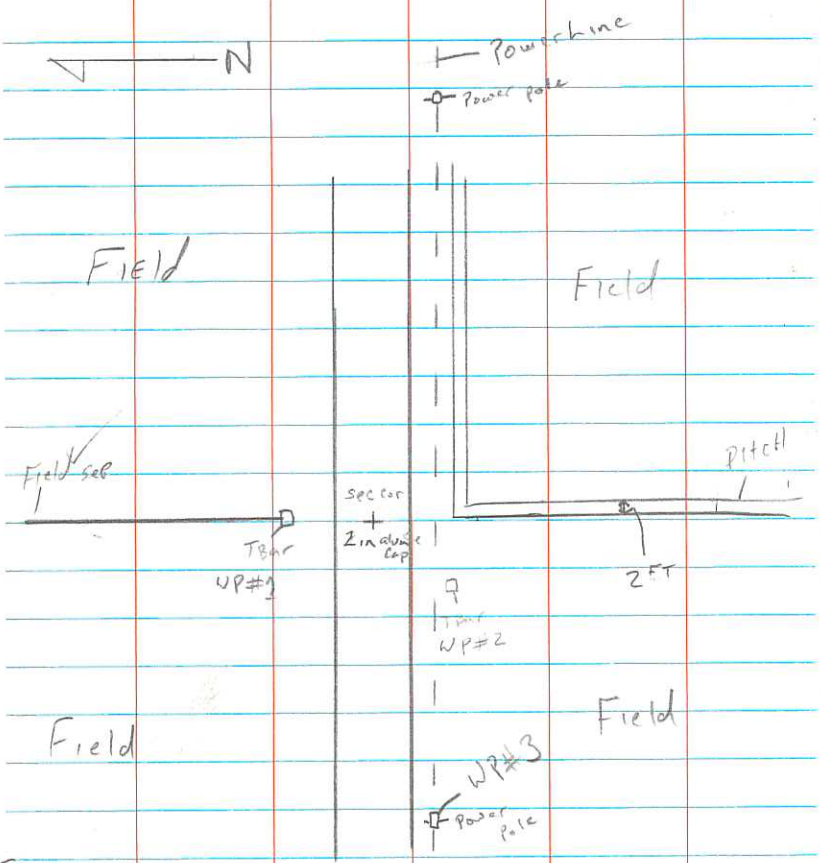

(N.Q Sec 6) Elev. = 4508.646

Pic # 110 #682


North 1/4 Section 6 Found 2 in alum. cap PLS#5267360 in Centerline of 800 North.

WP#1 is a t bar post 20.69 Ft North of monument,

WP#2 is a t bar post 23.951 Ft S W of mon.

WP#3 is a Power Pole 141.494 Ft West of Monument

NE Corner Section 6 T14N
R1E

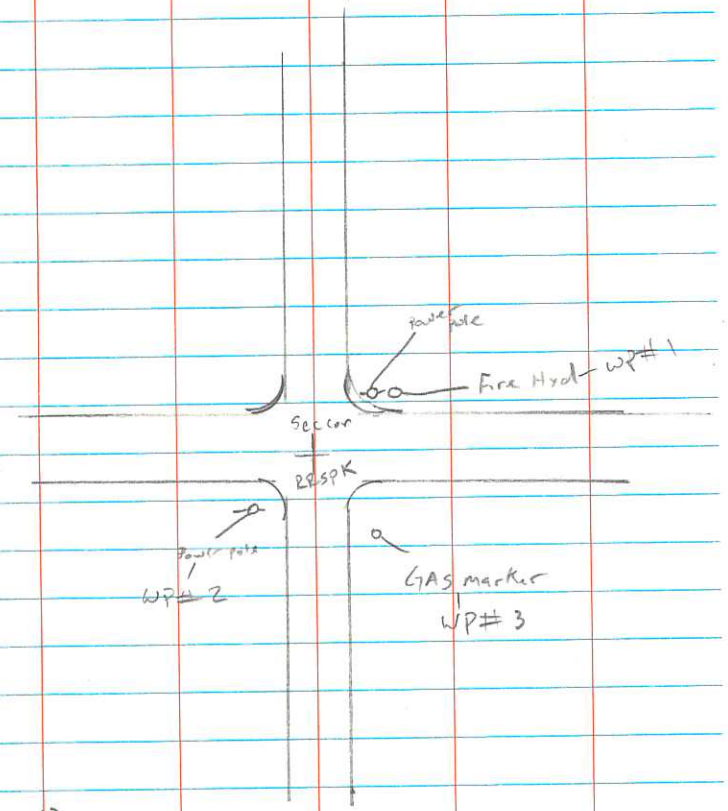


(NE Sec 6) #671

Pic #	North East corner Section 6 is RR SPK in Cntr
109	of Intersection of 800 west & North.
#200700	WP#1 is Fire Hyd 36.37 Ft SE of mon.
	WP#2 is Power Pole 37.55 Ft NW of mon.
	WP#3 is GAS MKR 46.11 Ft SW of mon.

N 1/4 Cor. Sec 5 T 14 N R 1 E

PNT # 686

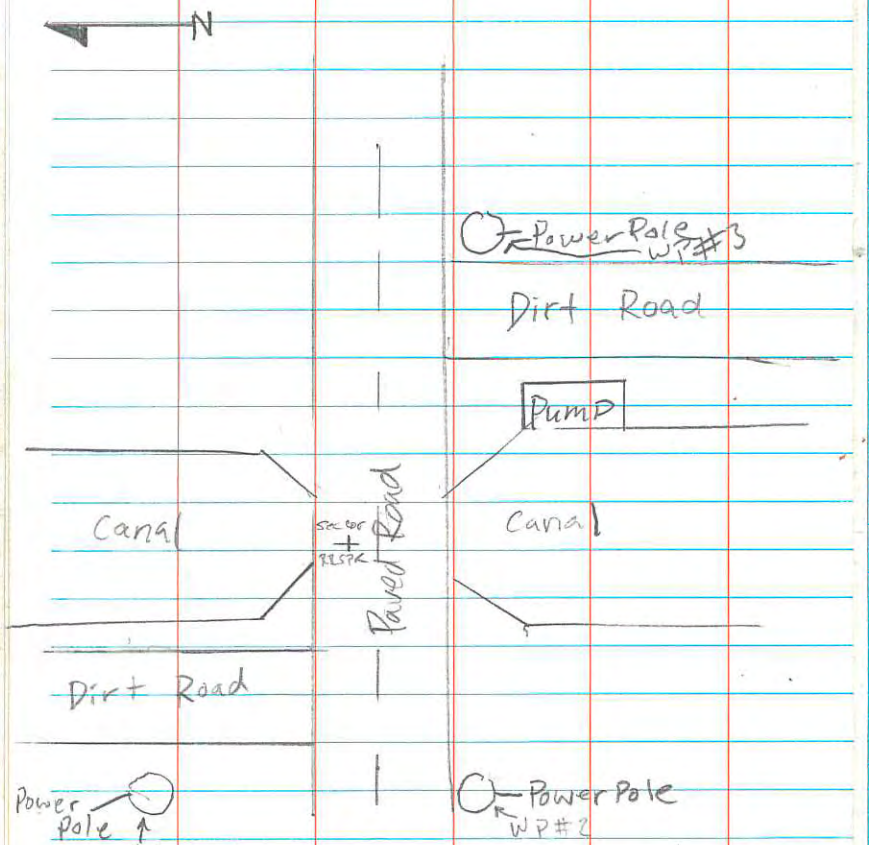


North 1/4 section 5 800 west ℄ North

(NQ Sec 5) WP#1 is power pole 48.58 NW of Mon.

#1 WP#2 is power pole 50.91 SW of Mon.


240700 WP#3 is power pole 58.96 S E of Mon.

#624 NorthEAST Corner Section 5 T14N
300700 R1E. Found spindle Need Reset.
11- -2010 Reset spindle w/2in Alum. CAP
MARKed NorthEAST Corner sec. 5
Reset w/2in Alum. CAP & did 10 min. Obs.
on 11-18-2010.

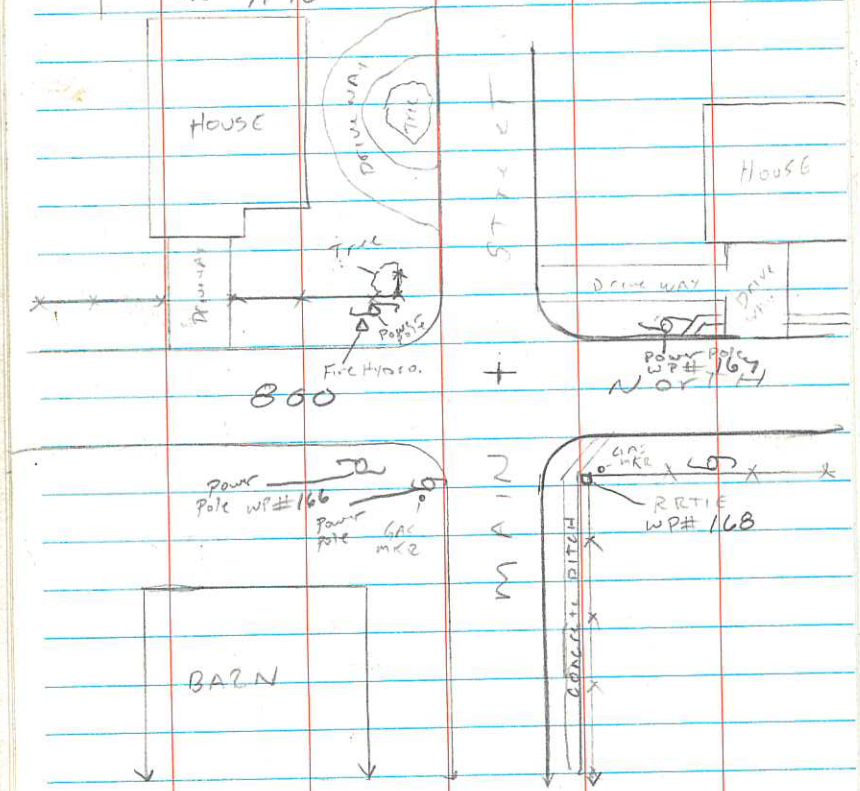

WP166 is powerpole 70 56/100 FT S.W. of monument.
WP167 is powerpole 50 18/100 FT N.E. of monument
WP168 is RRTIE 41 47/100 FT S.E of monument.

#666 SOUTH EAST corner section 2 T14N
#600600 R1E

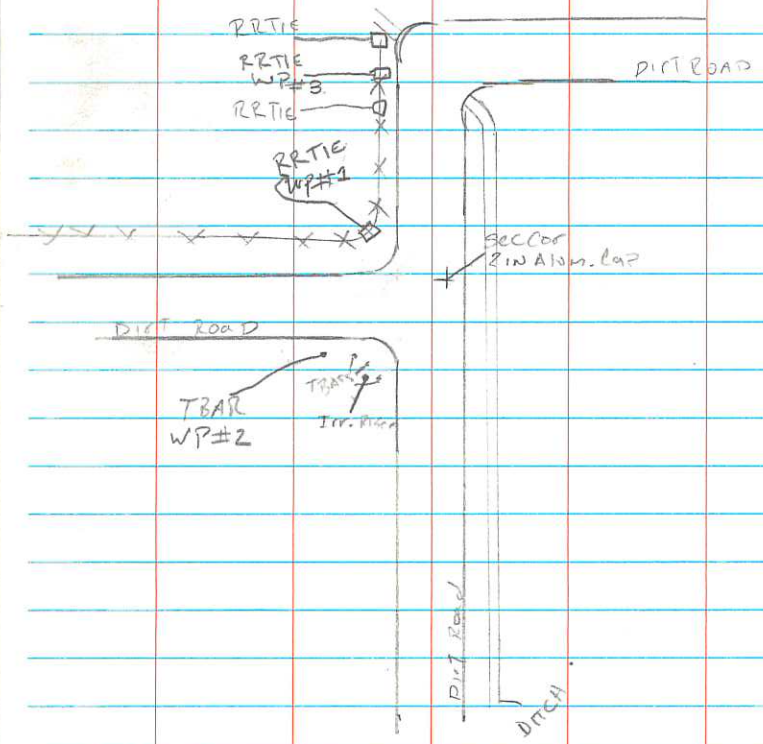

(SECOR, sec 2)

Found 2 in alum. cap, 2A CWEST Eng.
IN centerline of Gravel Road.

WP#1 IS RRTIE 30 70/100 Ft NE of mon.

WP#2 IS TBAR 38 81/100 Ft NW of mon.

WP#3 IS RRTIE 134 80/100 Ft E of mon.

RYAN
KEVIN

8-5-2010

T14N R1E
SEC. cor.
TIES

T @ Lewis V RICH H.= 4 71

SHOT


(NW cor, SEC 6) #665

#100700 ResHoT alum. Cap That we set ON 8-4-2010.

(SE cor, SEC 2) #666

#600620 Found Rebar and 2.in Alum. Cap LACWEST

North East Section 2 Corner

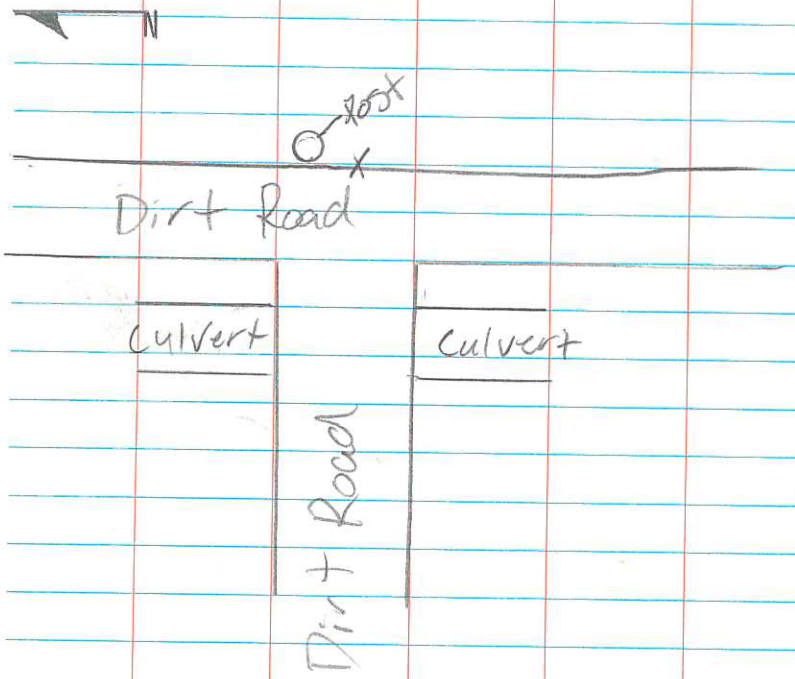

Found Section Corner with out cap, moved from where it Should be, reset Corner.

RYAN
KEVIN

8-5-2010

TOPO Sections
T14N R1E

To | Lewis | Rich | Hz = 4 71

POINT #		Desc.
1		Sec 5, 4 8 & 9

RYAN.

8-9-2010

Sec T16S

T14N R1E

XQ	Level ✓	NE cor sec 6	41 - 489
PNT #			
605	Spindle	EAST 1/4 sec	6
606	RBR NOCAP	SE corner sec	6
607	RR SPK	SOUTH 1/4 sec	5
608	RR SPK	SE. cor SEC	5
609	RR SPK	SOUTH 1/4 sec	4
610	RR SPK	SE. cor sec	4
611	RR SPK	EAST 1/4 sec	9
612 ✓	RR SPK	SE. cor sec	9
613	RBR w/cap	S.W. cor sec	9
614	RBR	S.W cor sec	8
615	RBR	EAST 1/4 sec	18
616	RBR	SE. cor sec	18
617	Rebar NOCAP	SE. cor sec	17
618	Jsh RBR	EAST 1/4 sec	20
619	Nail & Flag	SE. cor section	20
620	RR SPK	North 1/4 Sec	21
621	RBR Pinch plug	EAST 1/4 Sec	17
622	MAG NAIL	EAST 1/4 Sec	8
623	MAG NAIL	EAST 1/4 Sec	5
624	Spindle	NE Corner Sec	5
625	RR SPK	EAST 1/4 sec	32

Ryan
Kevin

8-10-2010

SEC TIES
T14N R1E


TQ Level V HI = 5.22

PNT #	
626	Square head bolt SW Corner section 7
627	CALHE County Brass Cap mon NE cor Section 12 IN JOB # TIMBLE
628	CALHE County 2 in alum CAP EAST 1/4 Sec 12
629	A.A. HUDSEN 2 IN ALUM CAP South EAst Cor Sec 12
PACH	SW Cor. Sec 4

PNT # 628 # 700540

EAST 1/4 Corner Section 12

Found 2 in alum. CAP 30 +/- FT EAST of ROAD N+S

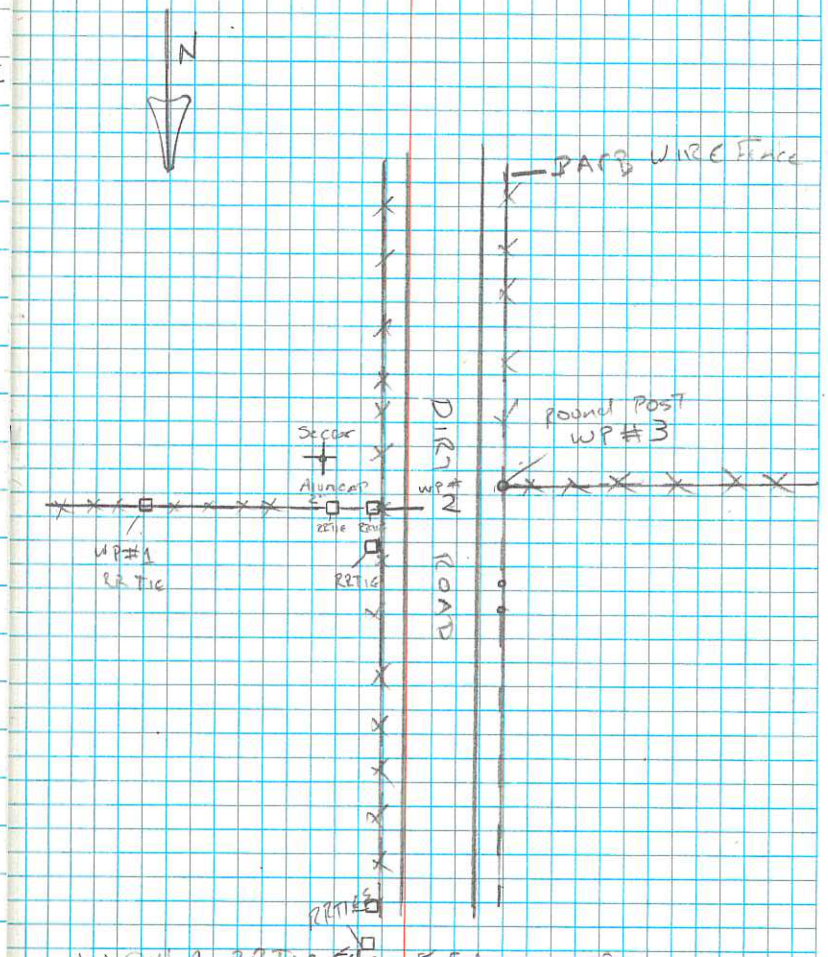


WP # 1 RR TIE 54.20 FT EAST mon
WP # 2 RR TIE 21.70 FT NW of mon
WP # 3 Round post 16.50 FT West of mon

PNT #
629

SOUTH EAST Corner Sec 12 T14N R1E

#700500 Found 2 in Alum. CAP. A.A. HUDSON
Held as SE. Corner Sec. 12

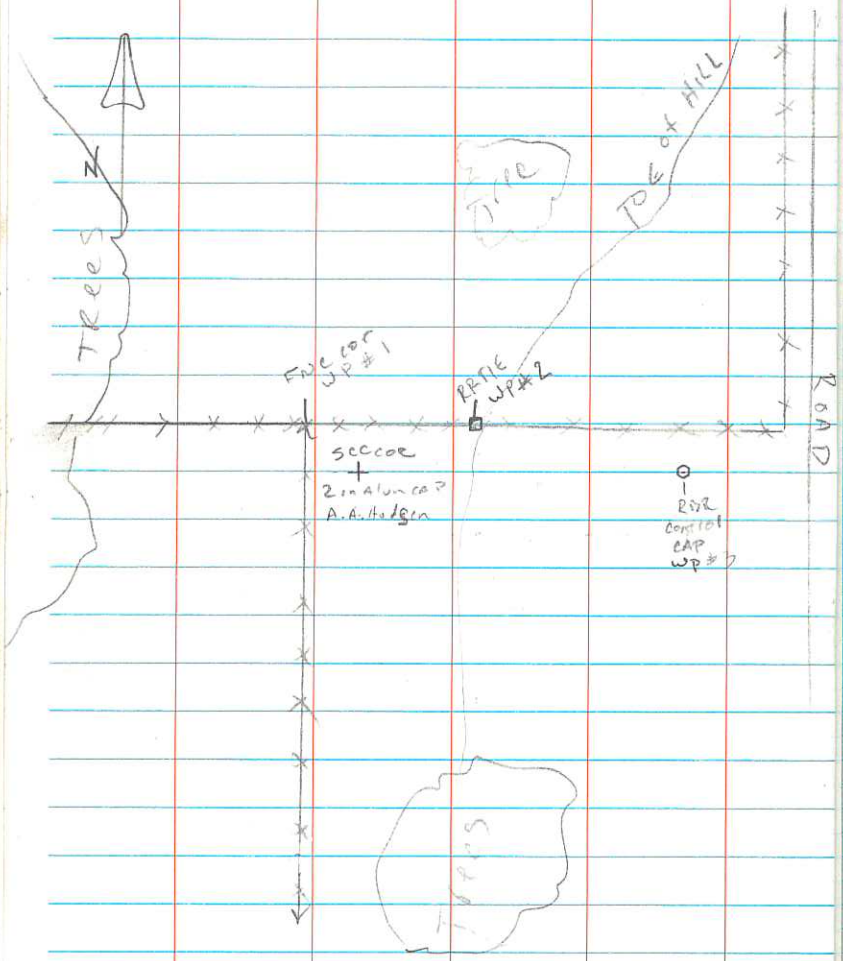

WP#1 Fence cor E+W+S 19.70 Ft SE of mon

WP#2 is RR TIE w Fence E+W @ top of HILL 45.20 FT EAST of mon

WP#3 is RDR w/Red cap on Top of HILL 153.65 FT EAST of mon

RYAN
KEVIN

8-11-2010

SEC TIES

T14N R1E

T@Lewis & Rich N-S 21

PNT#	Desc.
630	RRSPK in road SOUTH 1/4 Section 8
631	RRSPK in road SOUTH 1/4 Section 17
632	Mound of Stones IN Fence E+W E 1/4 Section 16
63	Found mag IN & ROAD E+W S 1/4 Section 9
633	Found RBR & DIRT ROAD E+W " S 1/4 Sec 24 N 1/4 Sec 25
634	Found mag - IN & Intersection 11800N & 2000E N 1/4 Sec 24 S 1/4 Sec 13

RYAN
KEVIN
8-12-2010

SECTIONS
T14N R1E

VRS BASE IS AGRC ✓ RICH .200m oFF

PNT #	DESC.
636	Brass CAP P.C. Mon 1978 EAST ¼ cor sec 23
#600340	Found 3.W Cache county Brass Cap .8FT South of fence E to W to N

VRS BASE IS LOgan CMR ✓ RICH .100m oFF

PNT #	DESC
#637	Found RBF IN DIRT Road SW cor Section 36


XO RICH KLEWI Hi = 5.20

PNT #	DESC
637	Found Rebar IN Road @ Intersection 9400 N 1600 E. PUT CACH COUNTY 2in alum. CAP on Rebar & tied for 10 min

obs. as SW corner section 36 T14NR1E

#637 S.W. Corner Section 36 T14N R1E

#600100

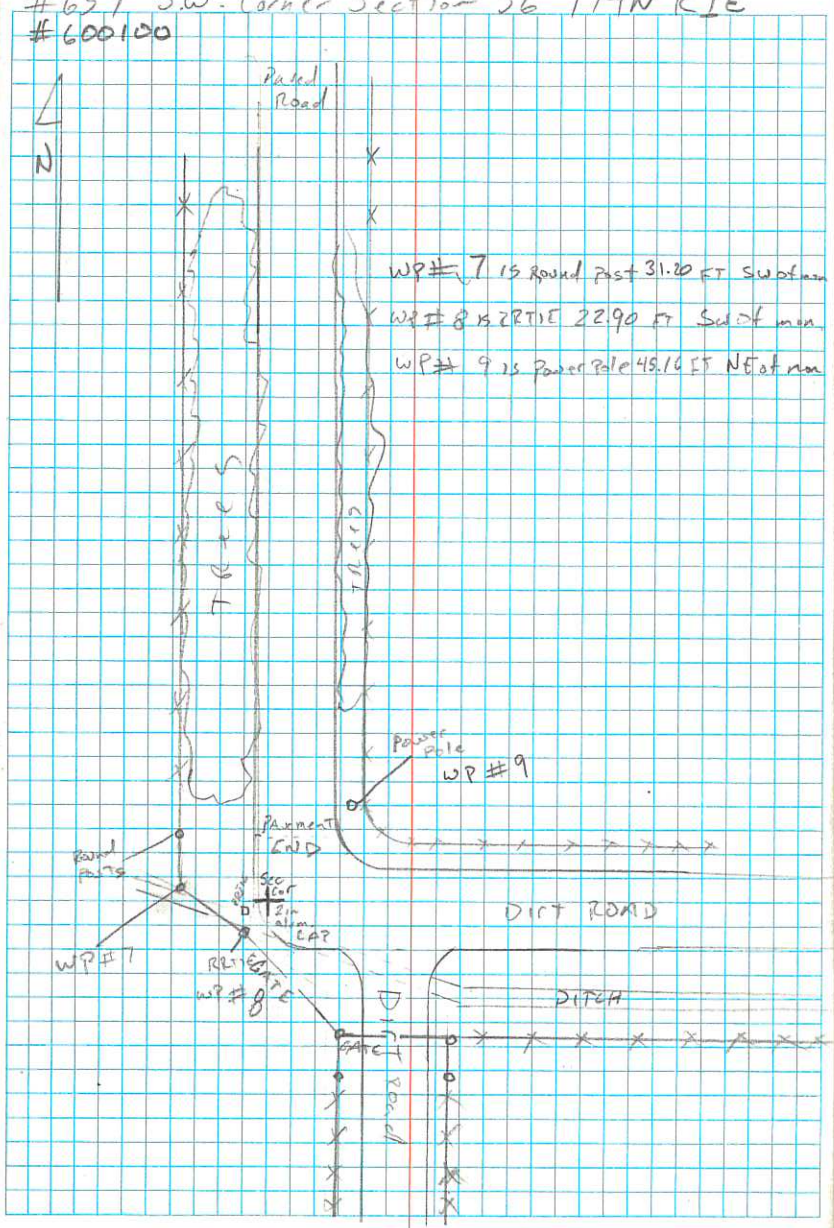

PNT #


638

#600.140


EAST 1/4 Section 35 & WEST 1/4 Section 36

Found 2 IN Alum. CAP. HUDSON 10 FT North

Gravel Road E+W.

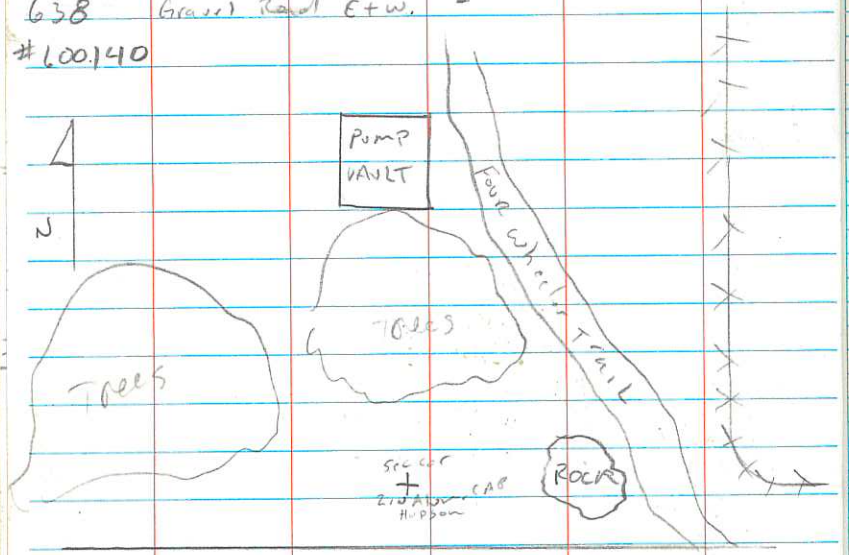

DIRT ROAD

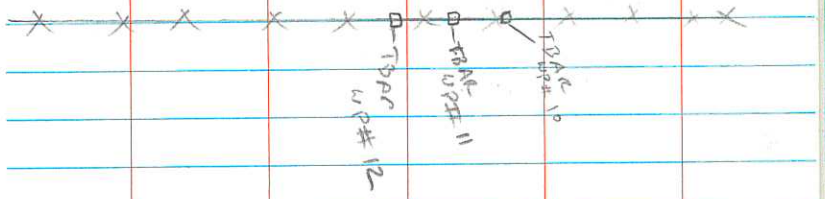

WP # 10 IS TBAR POST 418.00 FT SE of Sec Cor

WP # 11 IS TBAR POST 417.50 FT South of Sec Cor

WP # 12 IS TBAR POST 51.75 FT SW of Sec Cor.

RYAN

KEVIN

08-16-2010

TOPO Sec Cor

T14NR1E

642

BASE Log — CMR / RICH


PN + #'s — Desc


WP # 17 — Found REBAR in NW section 12,600 N, 1200 E — North 1/4 Section 14 is IRSPK in intersection 12600 N, 1200 E.

Job T14R1E & NORTH 1/4 Corner section 14 S 1/4 sec

#639 in Job # TopoSections

#540500

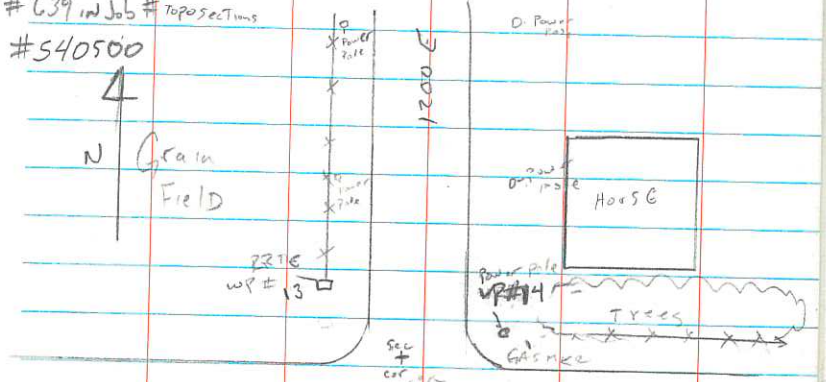

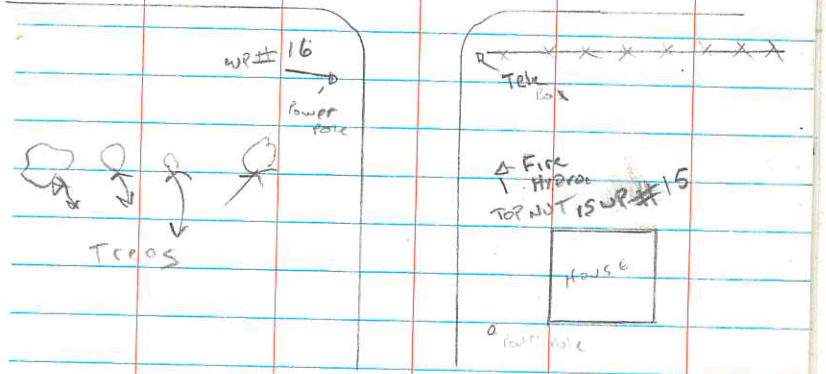

WP # 13 is RR TIE 57.25 FT NW of sec cor.

WP # 14 is Power Pole 27.20 FT NE of sec cor.

WP # 15 is TOP NUT of Fire Hydr. 86.7 Ft SE of sec cor

WP # 16 is Power Pole 72.51 FT SW. of sec cor.


RYAN
KEVIN
8-17-2010

TOPO SECTIONS
T14N R1E

BASE Logan Cmr ✓Rich

PNT #	DESC.	
640	Found 1in PIPE 3 FT WEST Fence S+W	E 1/4 Sec 19
641	Found 1/2in Rebar on west s/c of Dirt Road / N+S	
	S.E. Corner Section 19	
642	Found JSH RBR IN Fence E+S	S 1/4 Sec 20

#642 SOUTH 1/4 Section 20 #240300

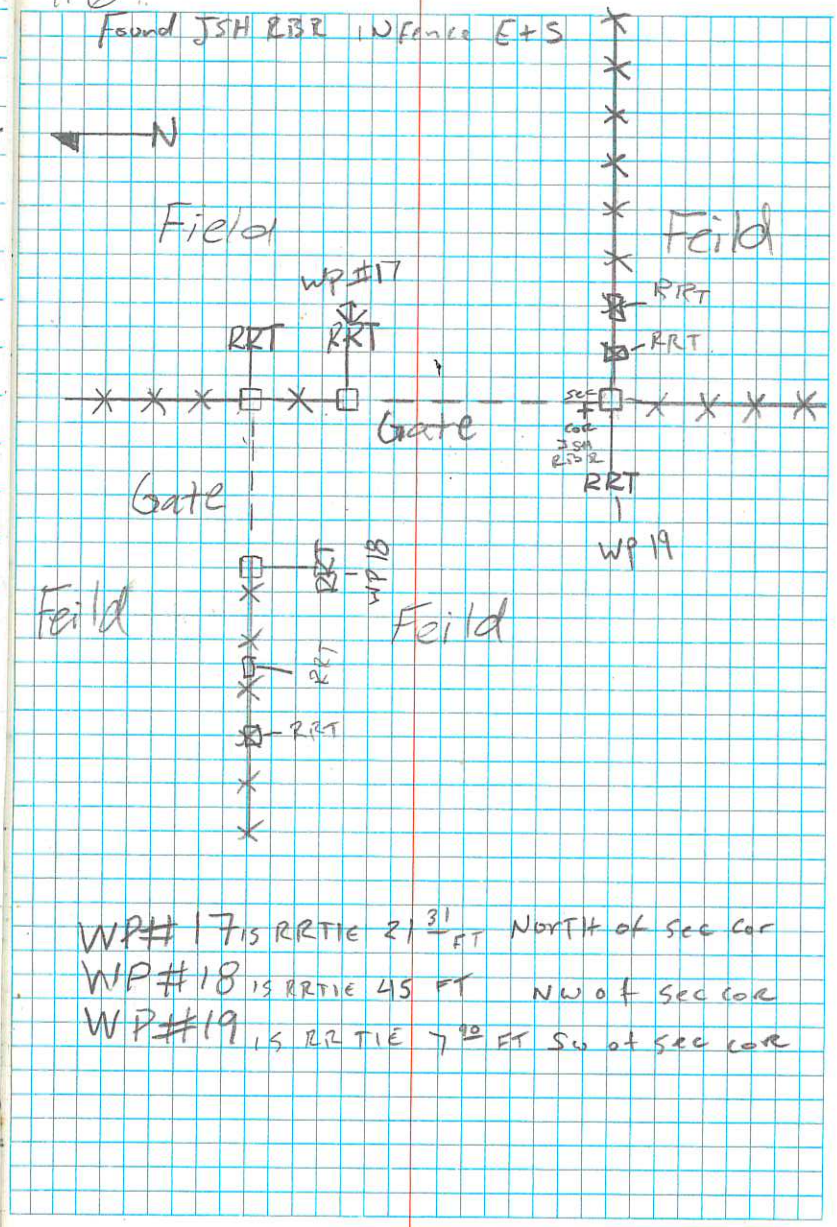

WP#17 IS RRTIE 21 31/100 FT NORTH of Sec Cor
WP#18 IS RRTIE 45 FT NW of Sec Cor
WP#19 IS RRTIE 7 90/100 FT SW of Sec Cor

RYAN


08-18-2010

TOPO sec. cor's

JOB ~~#~~ T14R1E

BASE is AGRI CMP PLUS ✓ Lewis

Point #	Desc.
625	West 1/4 Section 33 Found RR SPK IN
#300140	Pavement ℄ of Road E+W

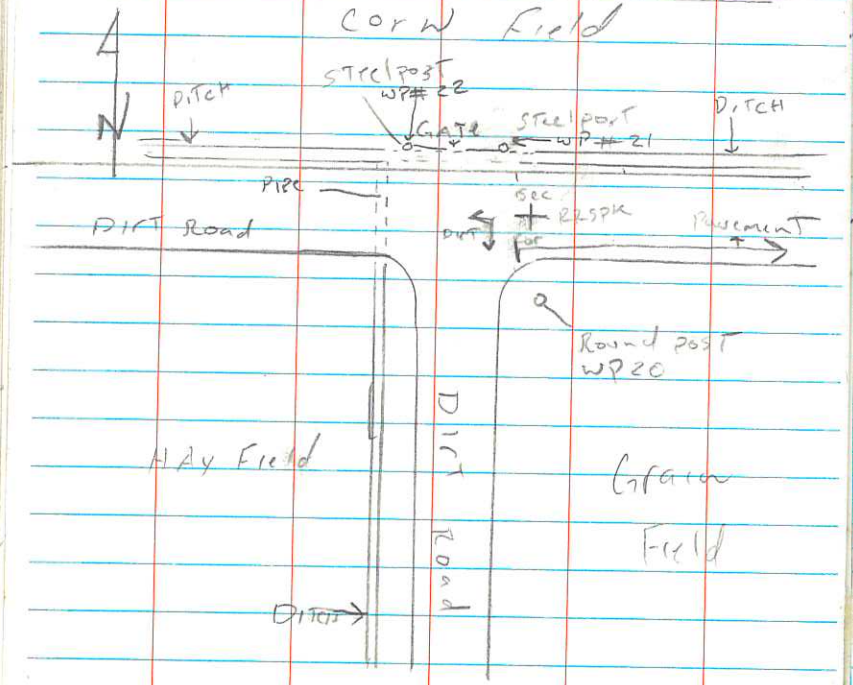

WP# 20 is Round post 28.23 FT South of sec cor

WP# 21 is Steel post 38.34 FT N.W. of sec cor

WP #22 is Steel post 58.81 FT N.W of sec cor

PNT #	Desc
643	Found Nail & Flash 1 FT North of ℄ of Road E+W SOUTH 1/4 section 18

- Looked for South 1/4 sec 7 could not Find Dirt Road
- Looked for South 1/4 sec 14 could not Find Grain Field.
- Looked for EAST 1/4 sec 16 Found mound of stones The DISTANCE is a little Dirt long.

#634 South 1/4 section 13 North 1/4 Sec 24


#640400 Found Rebar .2 FT Below surface from A

IN Center line of intersection 1800N 2000E

WP# 23 is POWER of FH 183.11 FT N.W. of cor


WP# 24 is RRTIE 26.68 FT N.E. of cor

WP# 25 is RRTIE 13.67 FTS. E of cor

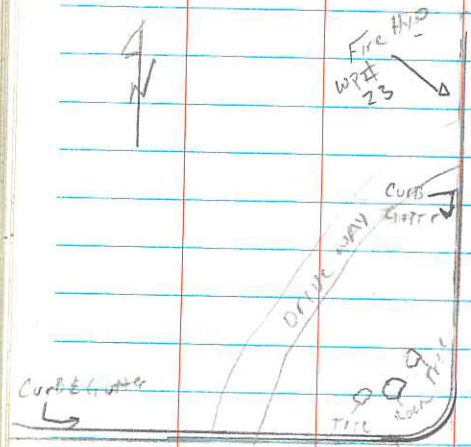




Sec Cor + Rebar

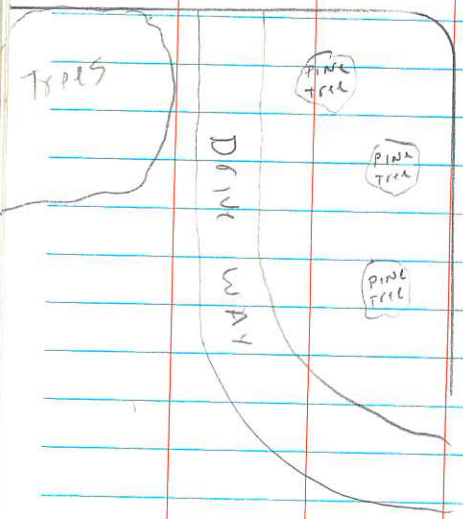

#340400

#620 South 1/4 section 16 & North 1/4 section 21

Found RR Spike IN Centr line of Road E & W

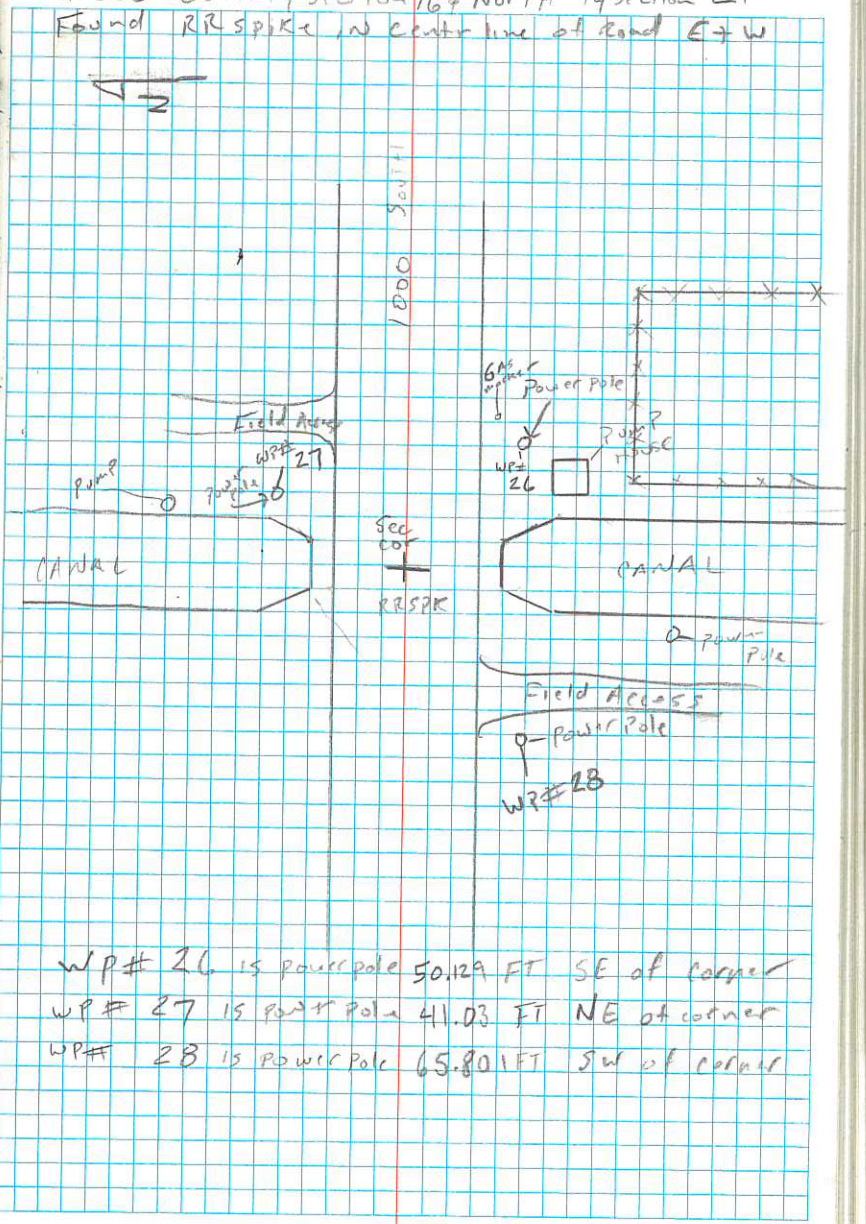

WP# 26 is power pole 50.129 FT SE of corner

WP# 27 is Power Pole 41.03 FT NE of corner

WP# 28 is Power Pole 65.801 FT SW of corner

RYAN

8-19-2010


TOPO Sec Cor's

T 14N R1E

BASE is AG9C CMR PLUS ✓ NW corner Sec. 6

Point #	Desc.
611	Found RR Spk in ℄ of Road N+S+E

#400540 EAST 1/4 Section 9

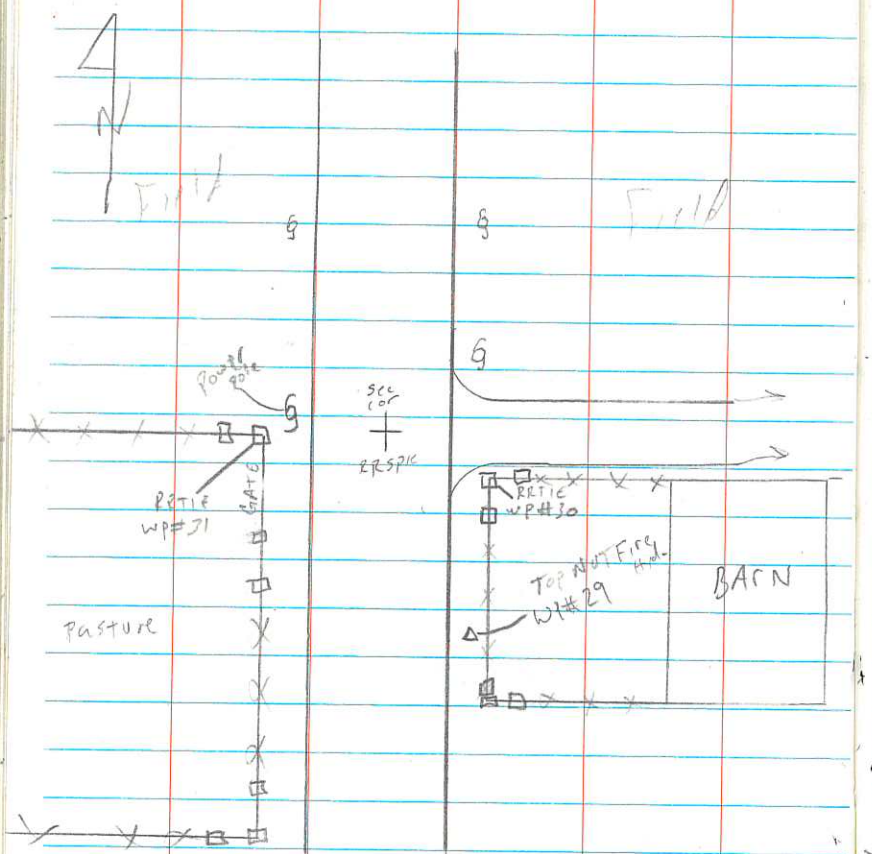


WP #29	is Top Nut of Fire Hyd. 54.67	FT SW of corner
WP #30	is RR Tie 39.55	FT SE of corner
WP #31	is RR Tie 34.72	FT West of corner

#400500

#612 S.E. Corner Section 9

Found RR Spk in Center Line of Road

E+W+N+S 800E & 800S.

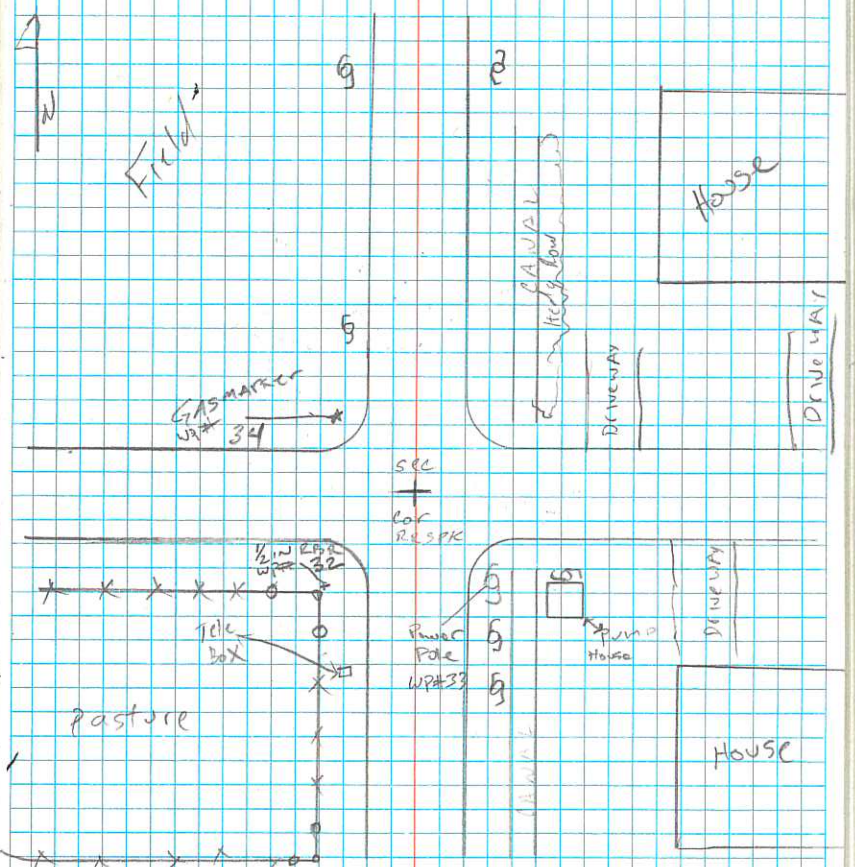


WP #32	is 1/2 in Rebar 46.97	FT SW of corner
WP #33	is Power pole 35.32	FT SE of corner
WP #34	is Gas Marker 41.18	FT NW of corner

#300500

#613 SW Corner Section 9

Found Rebar & Cap WITH LS #160156 FLINT IN Clutter at Intersection Main Street & 800 South

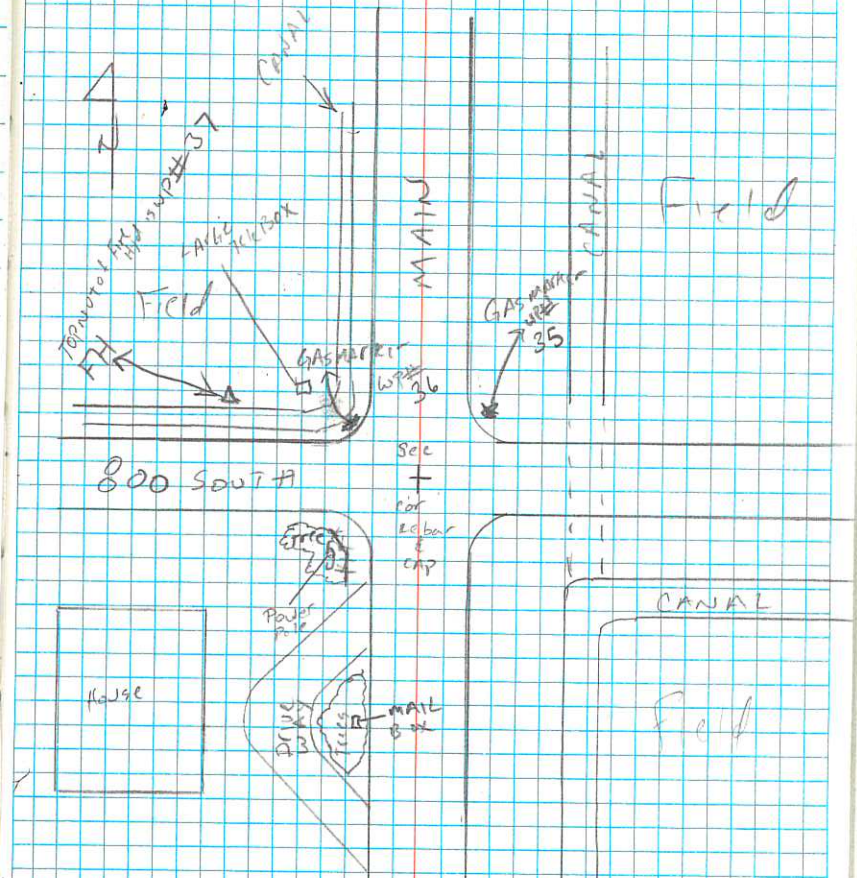

WP# 35 IS GAS MARKER 64.33 FT N.E. of corner

WP# 36 IS GAS MARKER 51.16 FT N.W. of corner

WP# 37 IS TOP NUT of Fire Hydro 70.65 FT NW. of CORNER

RIAN

8-23-2010

T14 R1E


TOPO SECTIONS

BASE AGRC CMR Plus ✓ Low

PNT #'s

621 Found RBR. in center of Road N+S Held as

#306440 East 1/4 of section 17

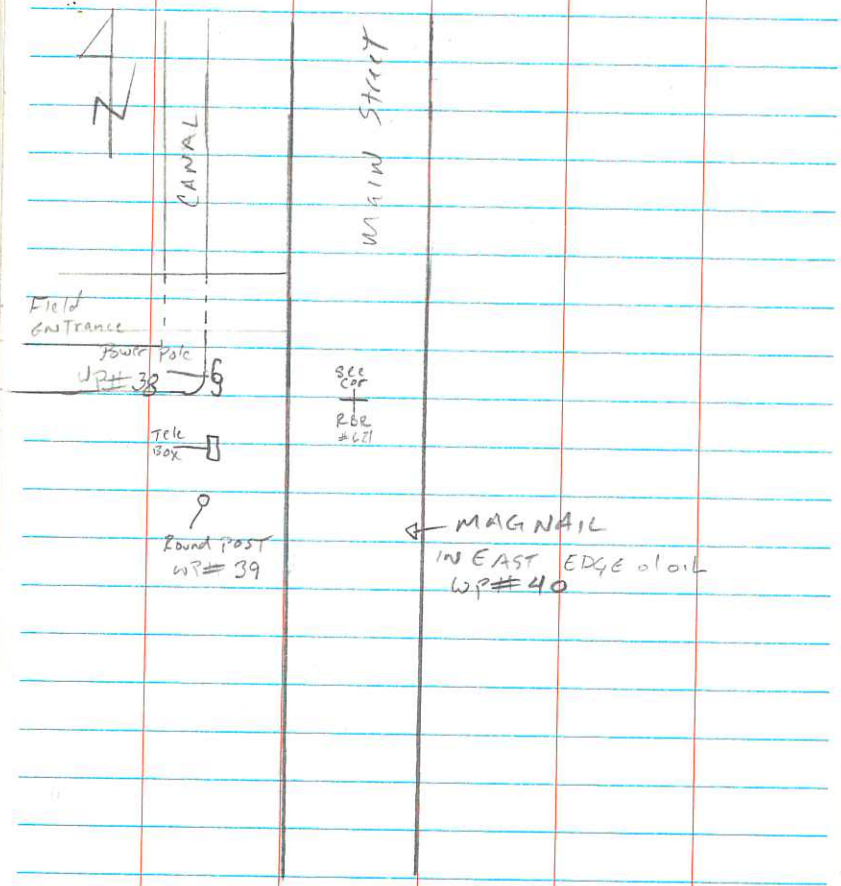

WP#38 is power pole 38.85 FT west of sec cor.

WP#39 is Round post 44.65 FT South west of sec cor

WP#40 is mag nail on east side of Road 28.45 FT S.E. of cor.


#615 West 1/4 Section 17 over →

Found Rebar in Road N+S

Held as west 1/4 Section 17

#615 west 1/4 section 17

#200440

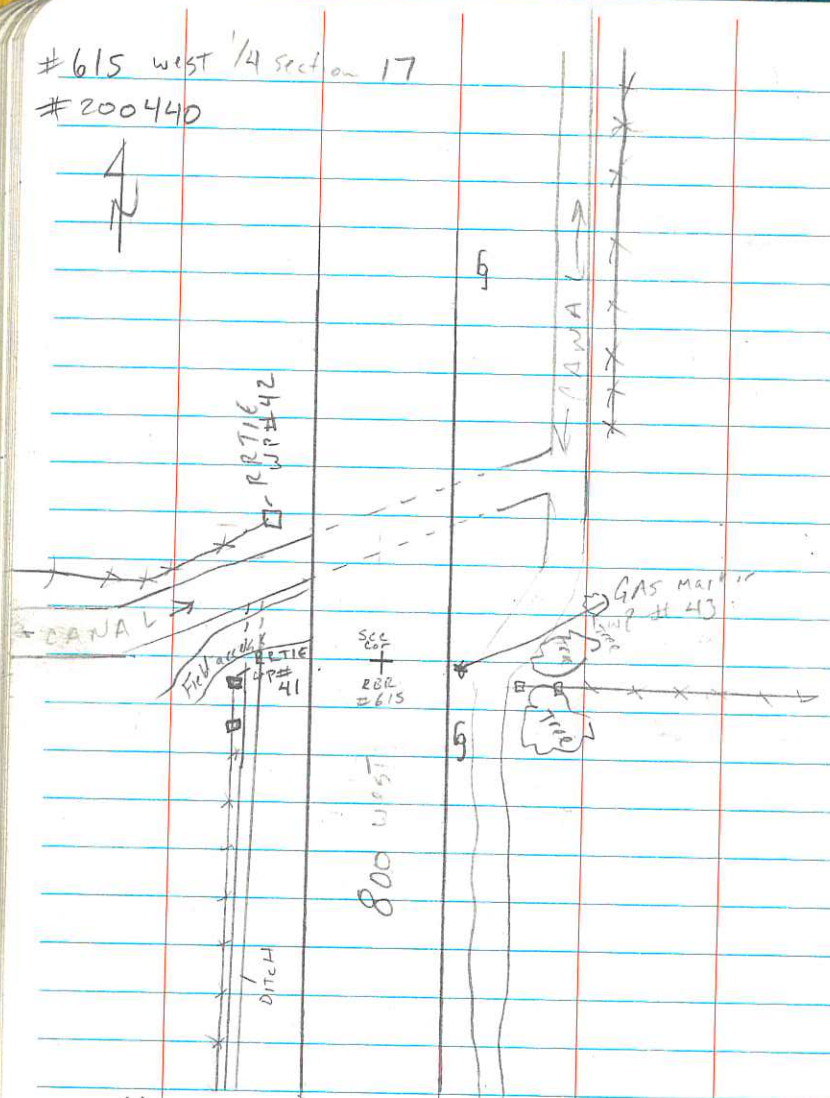

WP# 41 is RR TIE 44.00 FT west of sec cor

WP#42 is RRTIE 67.00 FT N.W of sec cor


WP# 43 is GAS marker 16.00 FT East of sec cor

#200400

#616 SOUTH WEST corner Section 17

Found Rebar in Center of intersection

800 west 1600 S Held as S.W. corner Section 17.

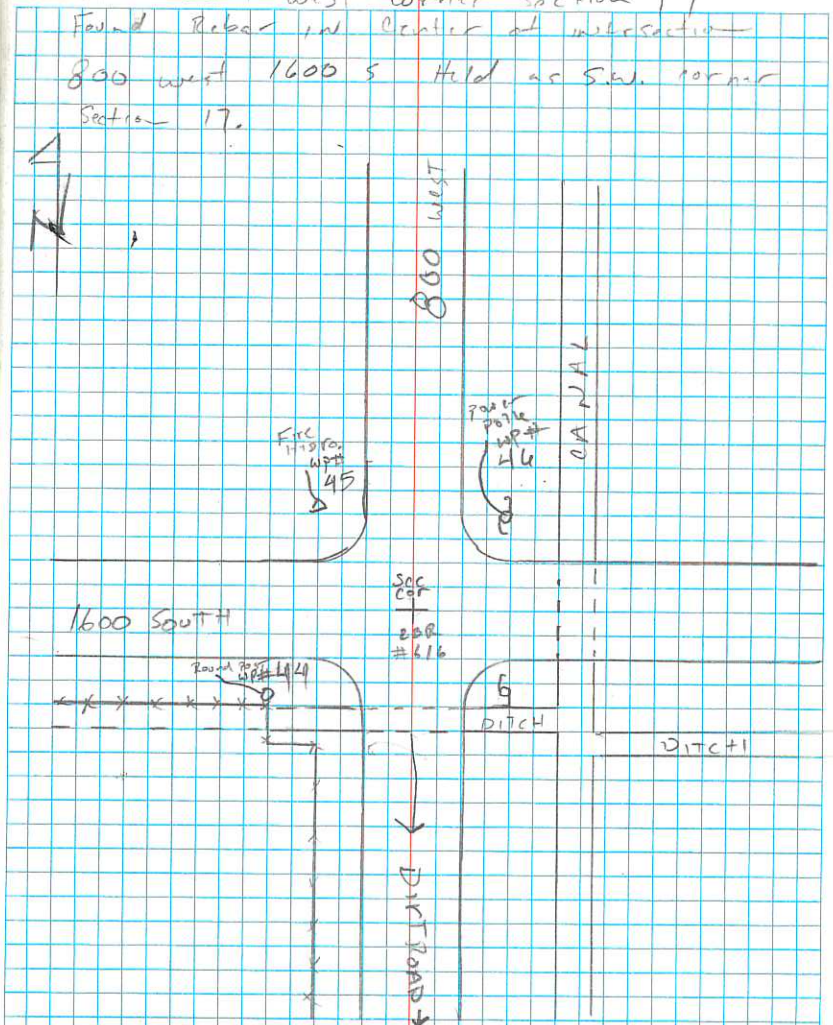

WP# 44 is Round Post 47.00 FT S.W of sec cor


WP # 45 is Top west of FH 66.00 FT N.W. of sec cor

WP# 46 is Power pole 65.00 FT NE of sec cor

#200500

#614 S.W. Corner Section 8

Found Rebar in intersection 800 S. 800 W. Held as South west corner section 8

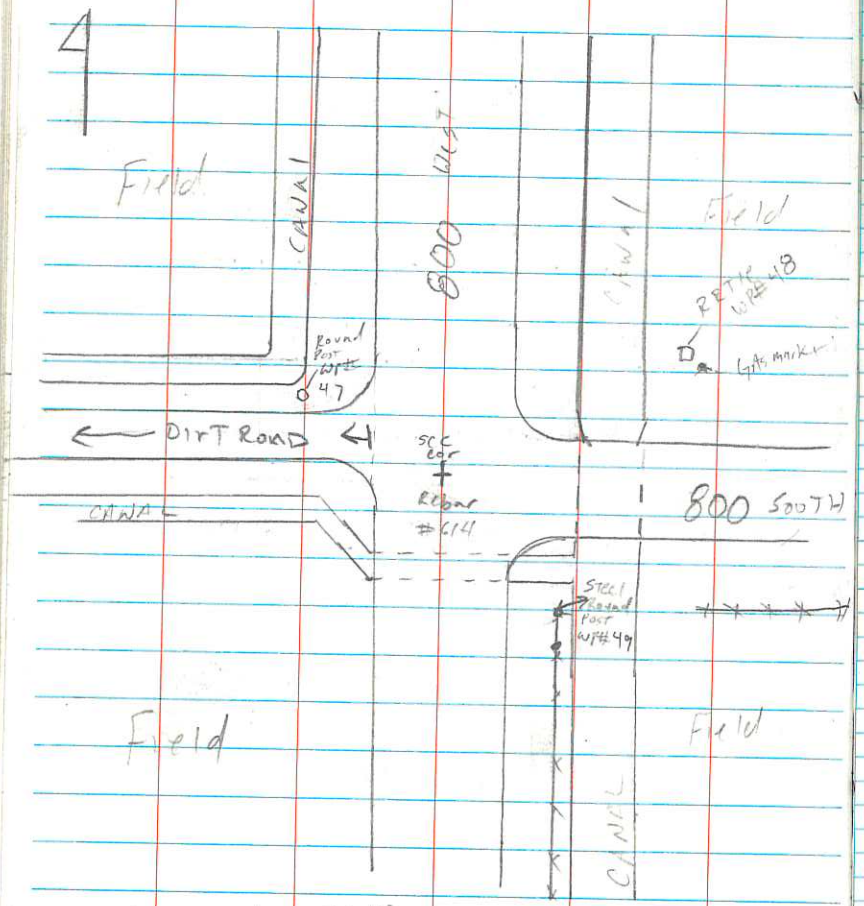

WP # 47 is Round post 51.45 FT N.W. of Sec cor


WP # 48 is RR TIE 85.50 FT NE of Sec cor

WP# 49 is Round steel post 65.35 FT SE of Sec cor

#240500

#630 S 1/4 section 8

Found Rebar in center line of ROAD E+W Held as South 1/4 corner section 8

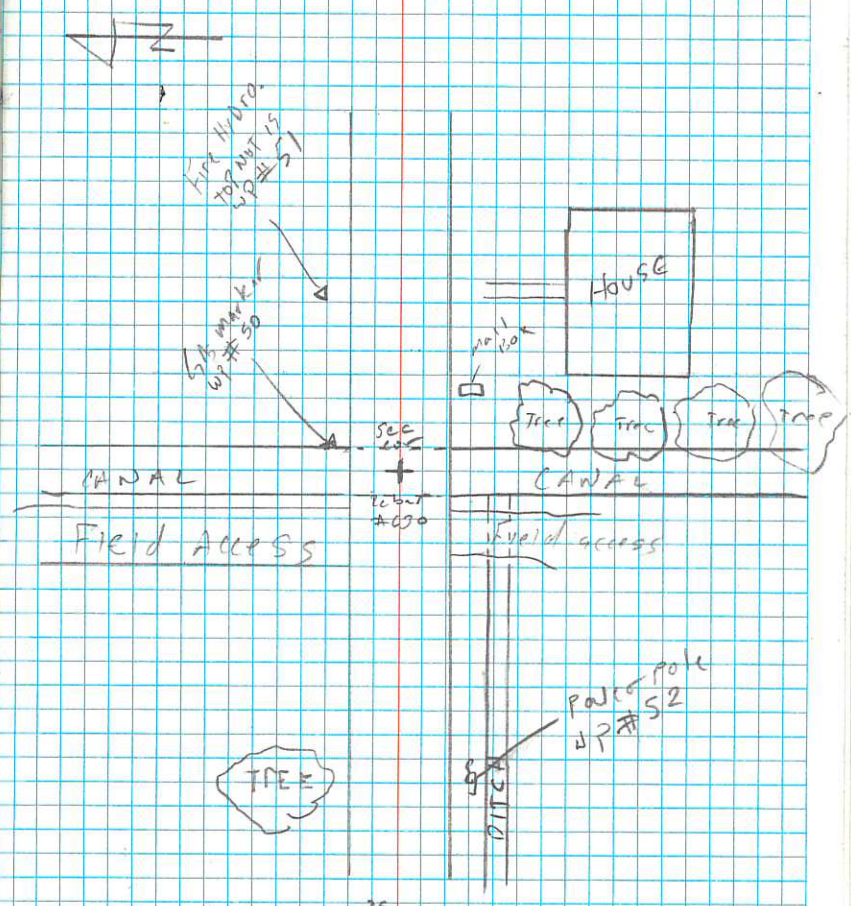

WP# 50 is GAS marker 26.35 FT North of Sec cor

WP# 51 is TOP NUT on Fire Hydrant 119.90 FT N.E of Sec cor


WP# 52 is power Pole 139.60 FT SW of Sec cor

#2410400

#631 South 1/4 Section 17

Found RR SPK in Cntr line of ROAD E+W

Held as South 1/4 Section 17

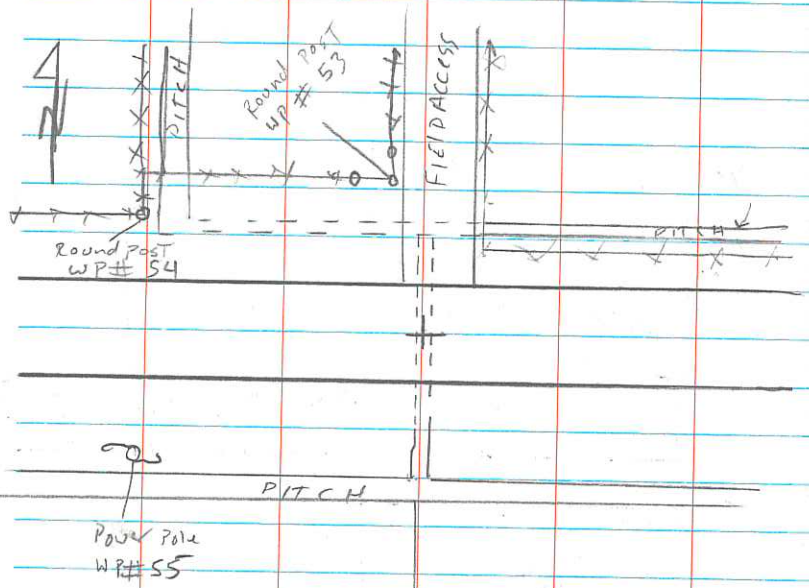

WP # 53 is Round post 4465 FT N.W. of sec cor

WP # 54 is Round post 19786 FT N.W. of sec cor

WP # 55 is Power Pole 18555 FT S.W of sec cor

RYAN

8-24-2010

T14N R1E

Topo Sections

BASE AGRC CMR Plus ✓ Lewi

#113 Tried to locate the west 1/4 of Section 31
No Point was found lands in River.

#110 Tried to locate NE corner of Section 31
No point was found. I did locate some
old Barb Wire Fence on East edge of
dirt Road N+S No post were found
and Fence parts were very small.

#107 Tried to locate south 1/4 Section 28
Point lands in Plowed Field.

#106 Tried to locate S.E. corner section 28
Point lands in cultivated Field

#118 Tried to locate East 1/4 section 34
Point lands in cultivated Field.

RYAN
8-25-2010

T14R1E


BASE IS A GPS COMB Plot ✓ Rick

PNT #'s Desc.

646 North 1/4 section 26 #540300

Found Crow Rebar at End of Fence Running East .25 Feet SE of Vertical RAILROAD Track.

Found corner Using an A. A. HUDSON SURVEY #2010-0014A

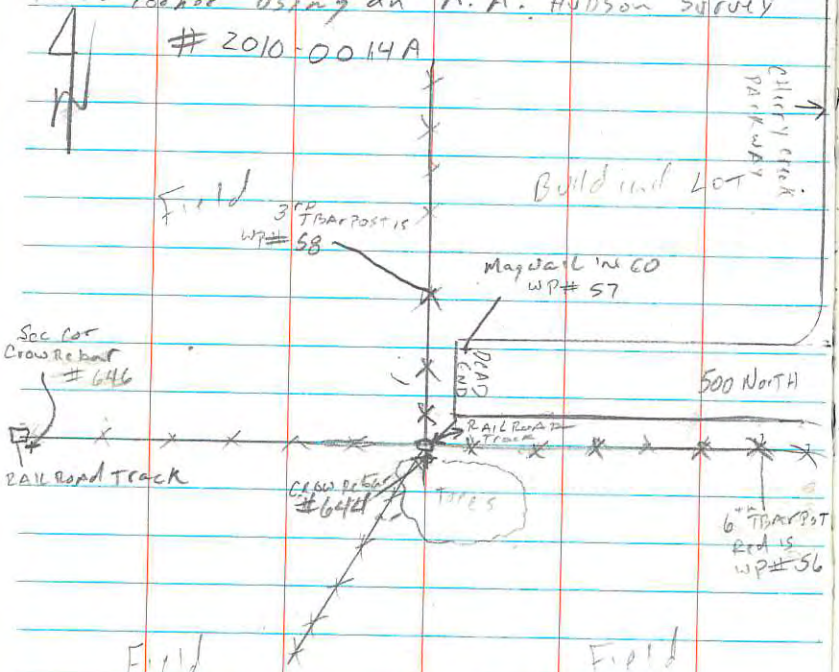

WP# 56 is 6th TDAR Post 333 43 FT EAST of Corner

WP# 57 is MagNail in CO 304 28 FT N.E of corner


WP# 58 is 3rd TDAR POST 290 88 FT NORTH of corner

644 is Crow Rebar 286 26 FT EAST of Soc corner

#618 West 1/4 Section 21

Found 1/2 IN REBAR in E Road N+S and IN Fence Projection E+W. Marked as West 1/4 section 21

#300340

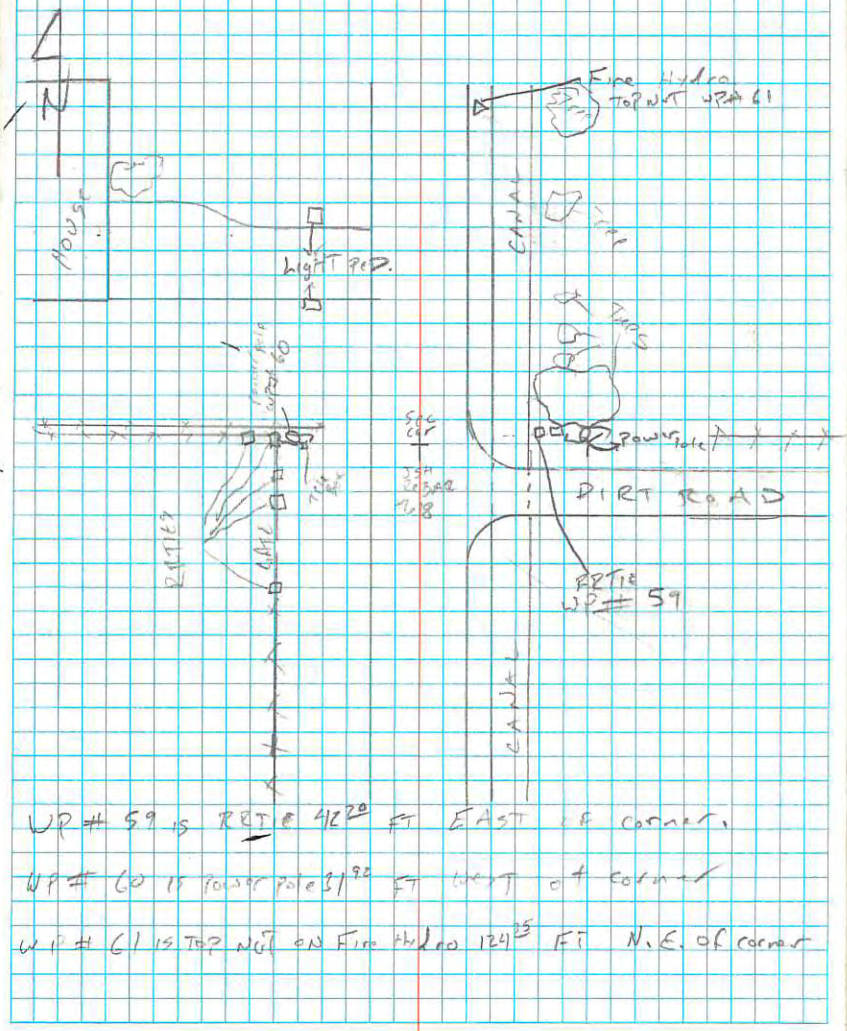

WP# 59 is RBTIE 412 20 FT EAST of corner.

WP# 60 is Power Pole 31 92 FT West of corner

WP# 61 is TOP NUT ON Fire Hydro 124 35 FT N.E. of corner

BIAN


8-26-2010

T14R1E

Section Lines

BASE AGRECOMPLUS RICH

PNT #	Desc.
645	Found RR SPK 3 FT South of ℄ of Road
#600300	C+W Held as N.C. Corner Section 26 Found corner using an A.A. Hudson Survey # 2010-0014A

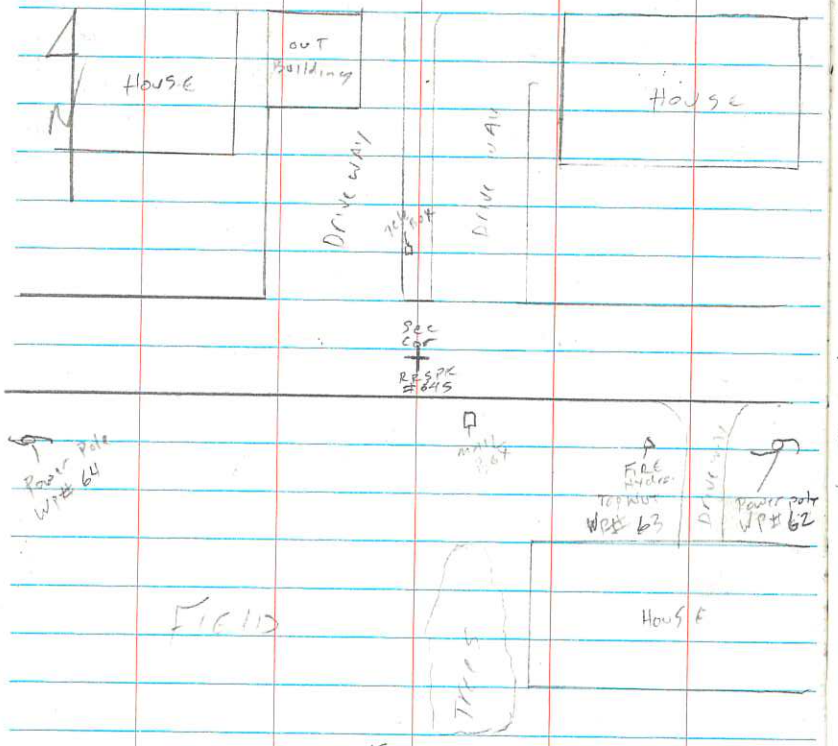

WP# 62 is Power pole 120^{45} FT S.E. Sec corner


WP# 63 is Top Nut on Fire Hydr. 90^{25} FT S.E. of Sec corner

WP# 64 is Power pole 133^{90} FT S.W of Sec corner

#600200

#647 SOUTH EAST Corner Section 26


Found AA Hudson Rebar w/ Aluminum CAP in Hay Field on WEST Facing Slope Buried .6 FT Below the surface. Held as the SOUTH east corner section 26 Found using A.A Hudson Survey # 2010-0014A

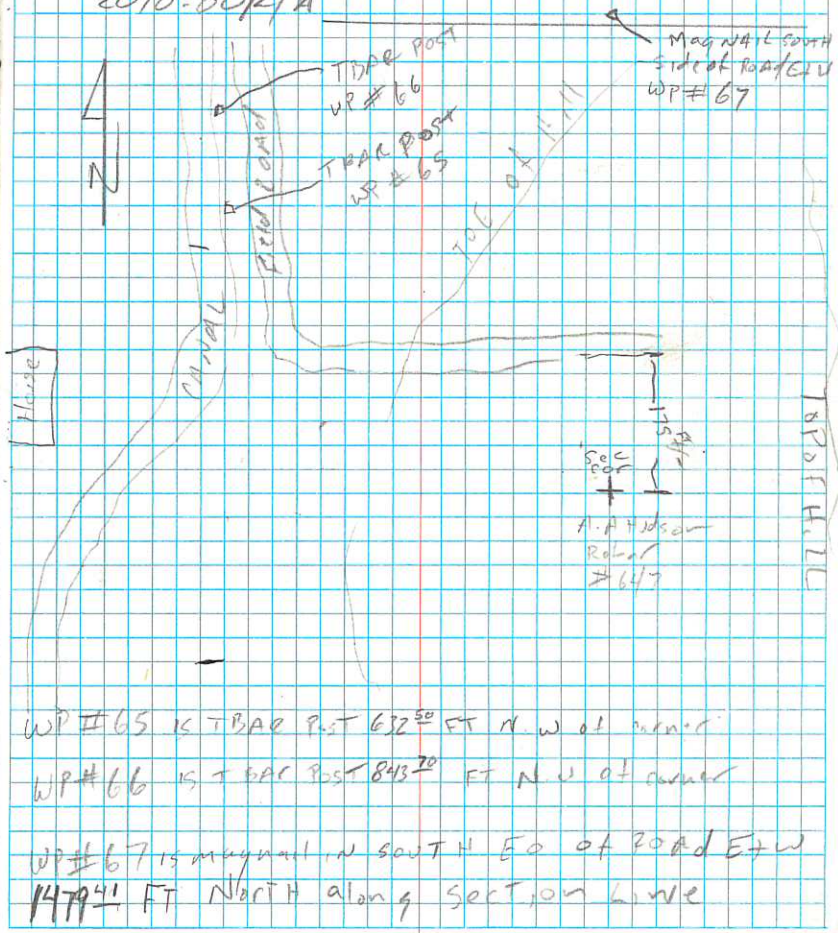
TBAR post WP# 66
Mag Nail South Side of Road E+W WP# 67
TBAR POST WP# 65
Sec Cor
A.A Hudson Rebar #647
175 FT
Tree
Tree
Tree

500240

#648 West 1/4 Section 26

Found A.A. Hudson Rebar & Aluminum Cap in Hay Field .5 Ft Below surface. Held as West 1/4 Section 26. Found using A.A. Hudson record of Survey # 2010-0024 A

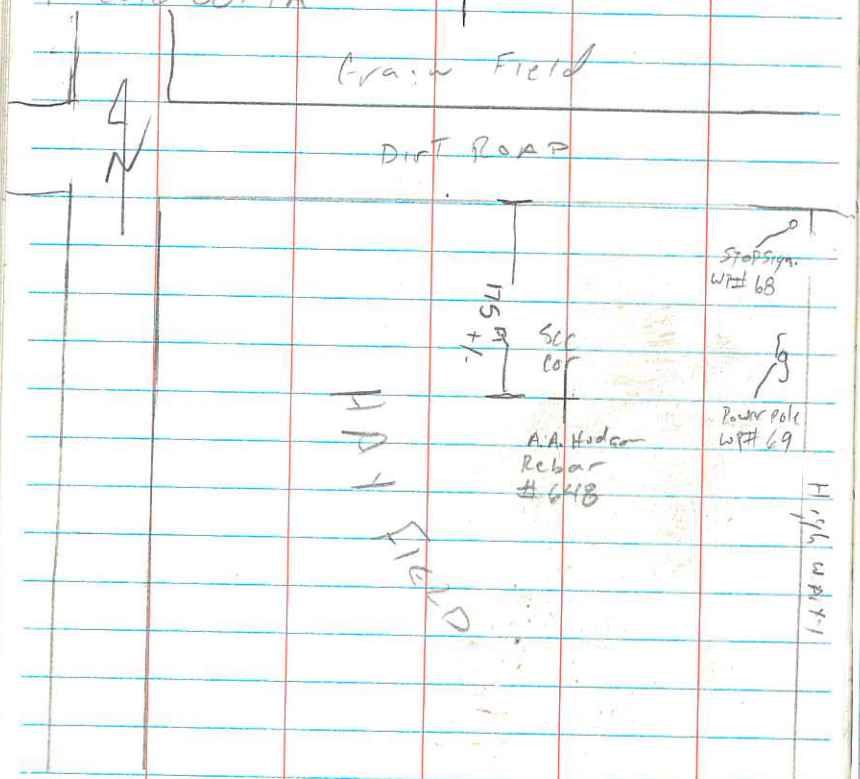

WP #68 is Stop Sign 573.75 Ft N.E of corner

WP # 69 is Power pole 556.50 Ft. N.E. of corner

RYAN

8-31-2010


T14N R1E.

Sec TOPO

BASE AGRC CMB plus VRS

PNT #

649 SW26 Found Rebar w/2" Alum. CAP R.A. #500200 Hudson 2.5' Below surface. Held as SOUTH WEST corner Section 24. Found using Record of Survey 2010-0014A

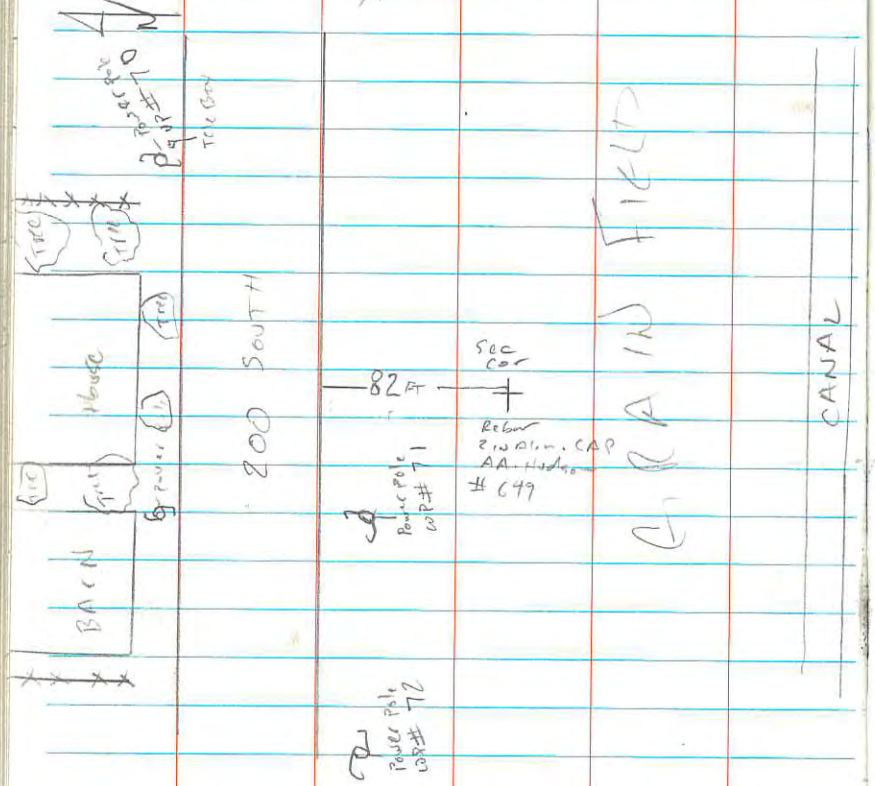

WP#70 is Power Pole 157.322 FT N.E. of corner


WP#71 is Power Pole 75.00 FT N.W. of corner

WP#72 is Power Pole 187.42 FT N.W of corner

#640300

#633 SOUTH 1/4 Section 24

Found Rebar in Center line of Dirt Road E+W No CAP. Put Cache County CAP on Rebar and Held as SOUTH 1/4 Section 24. Used AA. Hudson Record of survey #2006-0086

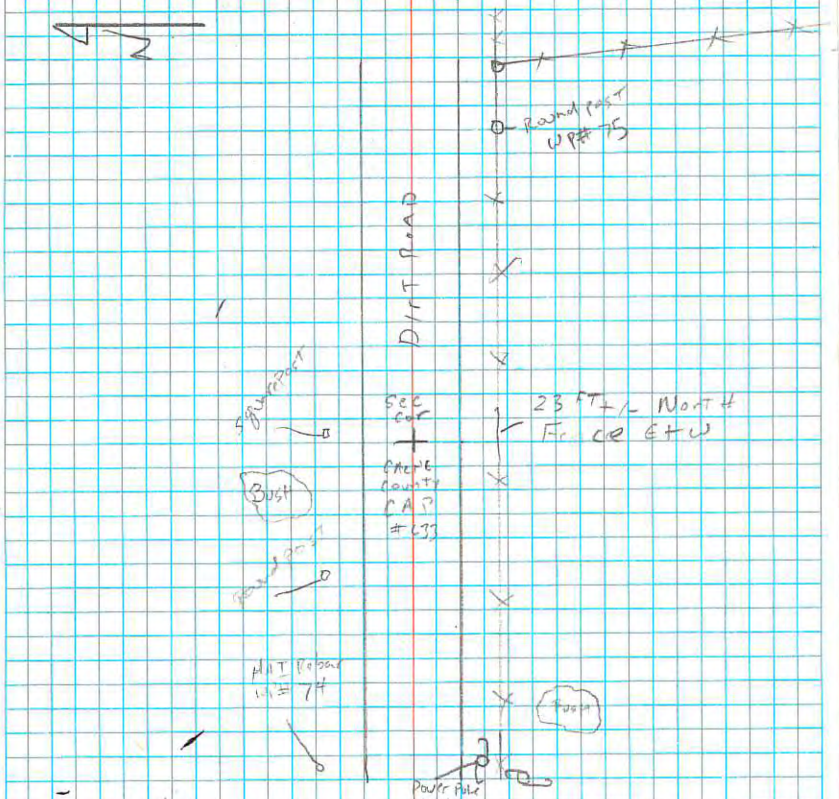
N
Round post WP#75
DIRT ROAD
Brass Post
SEC COR
Cache County CAP #633
23 FT +/- NORTH Fence E+W
Bush
Bush
Bush

RYAN

9-1-2010

T14N R1E

Section 7&8

BASE is AGRC_CORS_PLUS_VRS


PNT #

650 SOUTH 1/4 Corner Section 36

#640100 Found A.A. Hidden Rebar and alum. CAP

Using Record of Survey #2006-011C

Held as SOUTH 1/4 corner Section 36

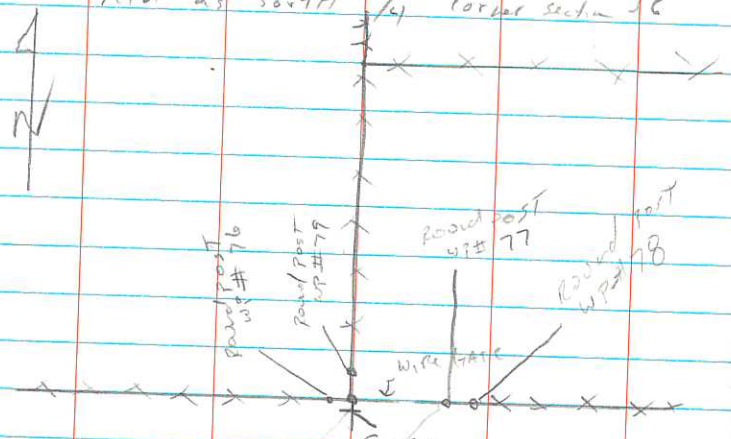

WP 76	IS Round post	4 50	FT N.W. of mon.
WP 77	IS Round post	24 59	FT N. C. of mon
WP 78	IS Round post	18 50	FT N.E of mon
WP 79	IS Round post	7 75	FT North of mon

RYAN


9-2-2010

T14N R1E

RYAN
9-7-2010

BAse is AGRC CMR_Plus ✓ Rich

PNT #	Desc.
651	
#640500	Found Rebar w/Red cap (HAI?) IN Fence corner N+S+W Held as South 1/4 section 12 Found Using. JSH Record of survey ~~#~~ 2004-910

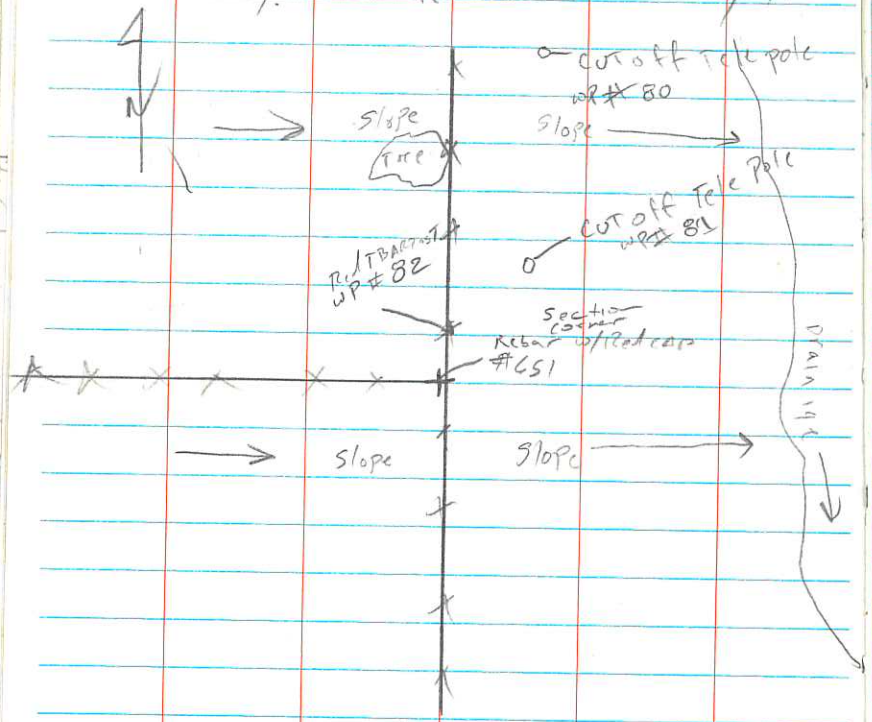

WP# 80 is cut off tele pole 167.57 FT NE of Corner

WP# 81 is cut off Tele pole 39.35 FT NE of Corner

WP# 82 is TBM post 17.18 FT North of Corner

T14N R1E

Topo Section 12


BASe IS AGRC CMR plus √ RICH

Point #	Desc.
#5030	Fnd witness Corner in Rail Road ROW. Fence A.M. Hdsd Rebar w/2in Al.Cap Point is 909.13 Feet west of corner

#600700

#652 NE. Cor Section 2

Used LARGEST Survey To locate corner found Rebar Had been disTurbed. Reset CAche County Alum CAP on 2FT Rebar -5 FT Below ROAD Surface according to LARGEST Survey, For Ronald D. MILLIGAN #99-24

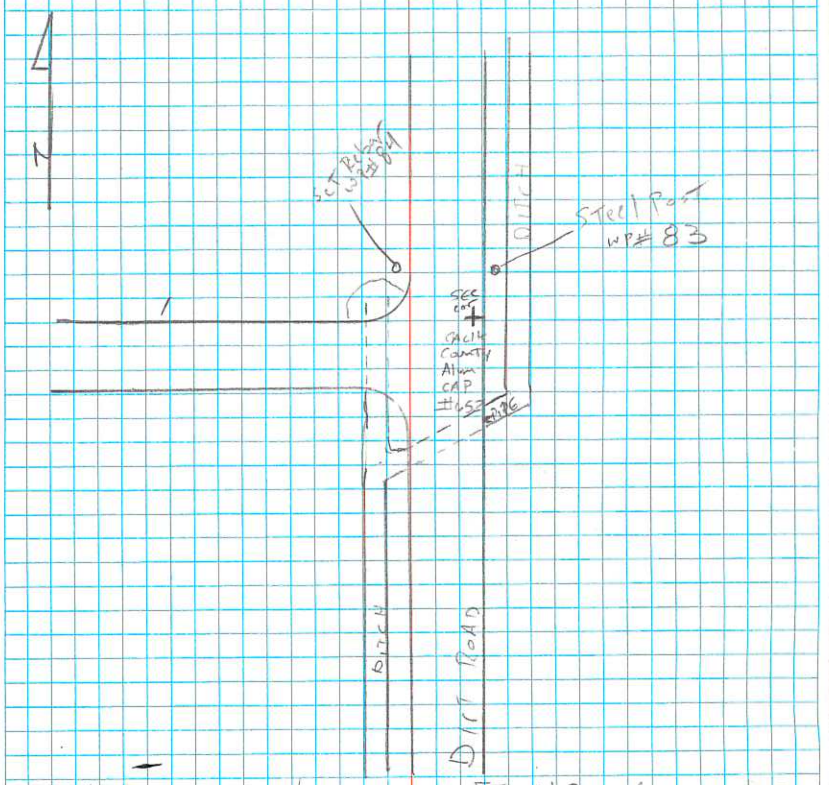

WP# 83 IS Steel Post 14.75 FT NE of corner

WP #84 IS Rebar w/cache county Alum. cap 29.50 FT N.W. of monument


RYAN

9-8-2010

T 14 N R 1 E

BASE IS AGRC cmb PLUS / SE corner section 2

PNT #	Desc
653	EAST 1/4 Section 2 Could not locate #600640 corner. Found The SOUTHEAST corner and The North east corner of section 2. Set Rebar w/2in cAcHe county ALm. CAP By single proportion . 2FT below surface to protect From cultivation.

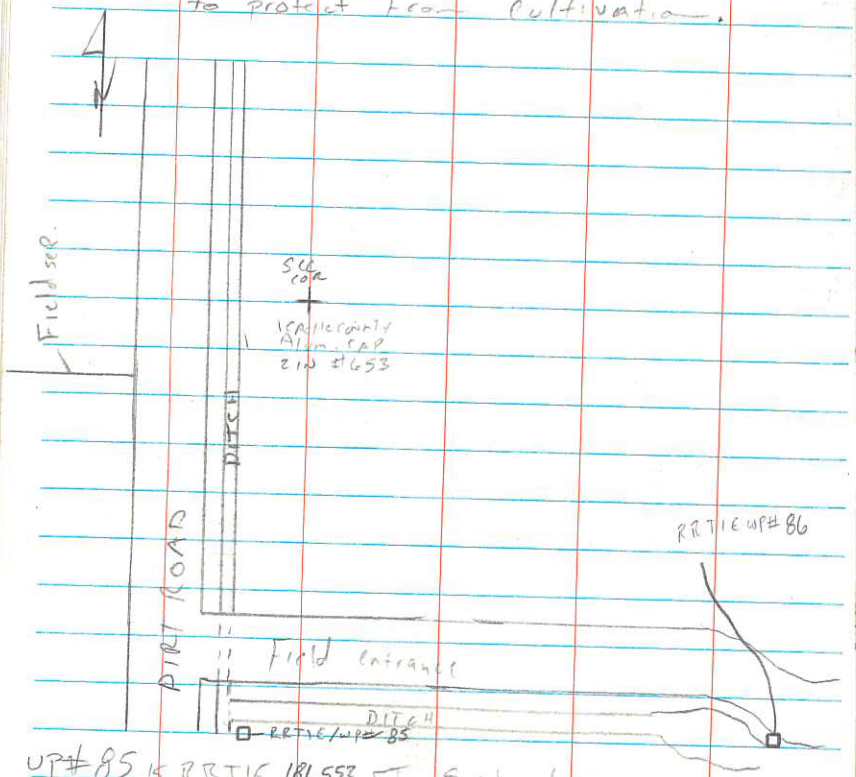


UP#85 is RRTIE 181.552 FT S.W of Sec cor.

UP#86 is RRTIE 547.522 FT S.E at Sec cor.

#300400

#617 SE corner Section 17

Found Rebar with out a CAP in center line of Intersection 1600 South & main. Held as The South east corner Section 17 Put a 2in alum. cAcHe county CAP on Rebar. Found Point USin / JSH Record of Survey # 2006-0132

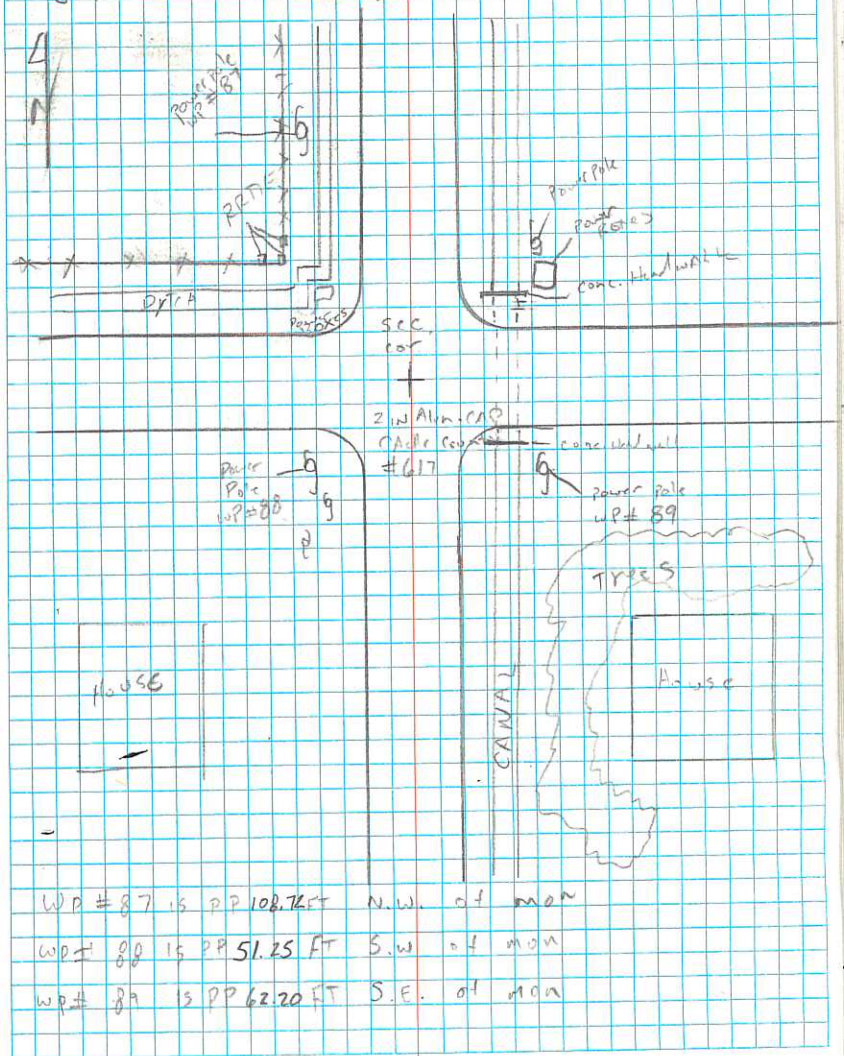

WP # 87 is PP 108.7 FT N.W. of mon

WP# 88 is PP 51.25 FT S.W. of mon


WP# 89 is PP 62.20 FT S.E. of mon

RYAN
9-9-2010

TIHNRIE

BASE IS AGRC_CMR PLUS ✓ PNT ISHEWT

PNT #	DESC
619	Found NAIL & FLASH IN ROAD N+S
#300300	Held as S W. Corner Section 21. SET Rebar w/ CACHE County 2 IN Alum. CAP IN place of NAIL & Flash.

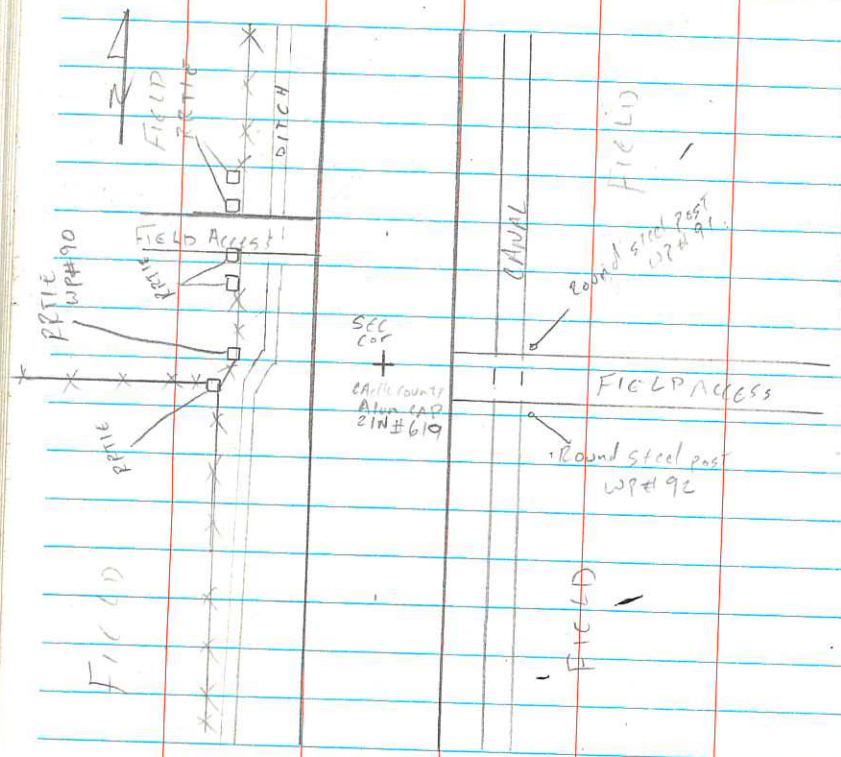

WP#90 IS RBTIE 45.00 FT S.W. of corner

WP# 91 IS steel post 45.20 FT N.E. of corner

WP# 92 IS steel post 52.60 FT S.E. of corner

RYAN

9-13-2010

T14N R1E

BASE AGPC CMP plus ✓ Lewi

PN+# Desc

619 Sw. corner Section 21


#622 EAST 1/4 Section 8 Found NAIL & Flash

#300540 In E of Road N+S Held as EAST 1/4 Section

8 Replaced NAIL & Flash with a 2in Cap

Count'n Alum CAP & Rebar. NAIL & Flash was set

BY Peterson Land surveying For "Boyd Preece" Survey #1998-07

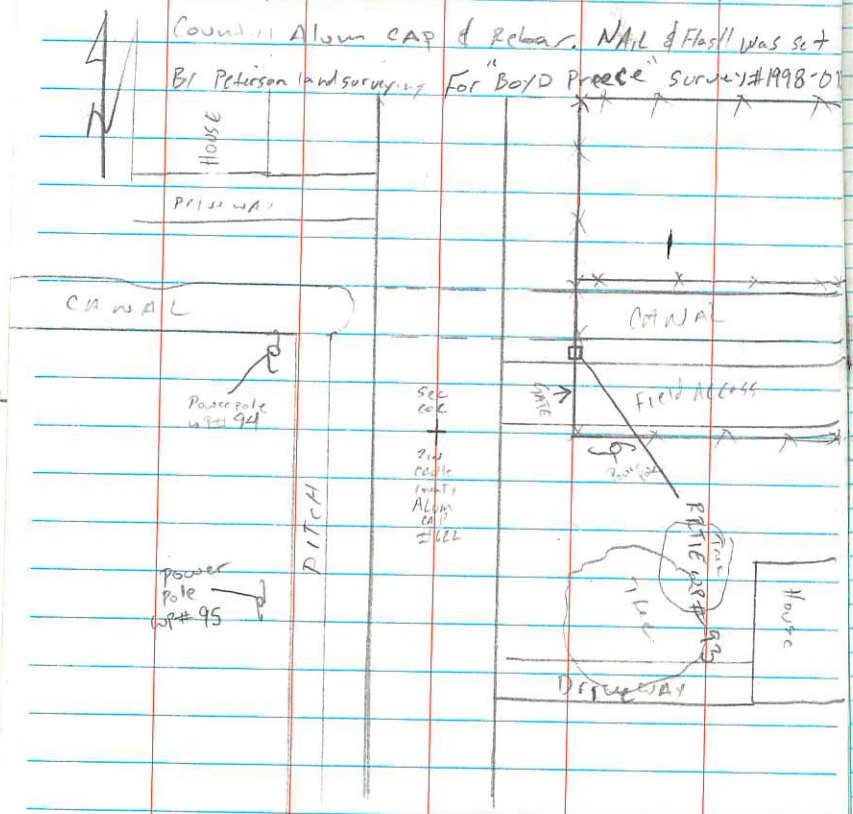

WP#93 is RATIE 56.15 FT N.E. of Sec. Corner

WP#94 is Power Pole 37.25 FT N.W. of Sec. Corner

WP#95 is Power Pole 89.00 FT S.W. of Sec. Corner.

RYAN

9-14-2010

T14N R2E

BASE IS AGRC CMR. PLUS #612 S.E. corner section 9


PNT# DCSC

654 Found mag nail in center line of road

#340500 E+W held as SOUTH 1/4 corner Section 9.

Replaced Mag nail w/RR SPK. Found using

A.A. Hudson Record of survey #2008-006

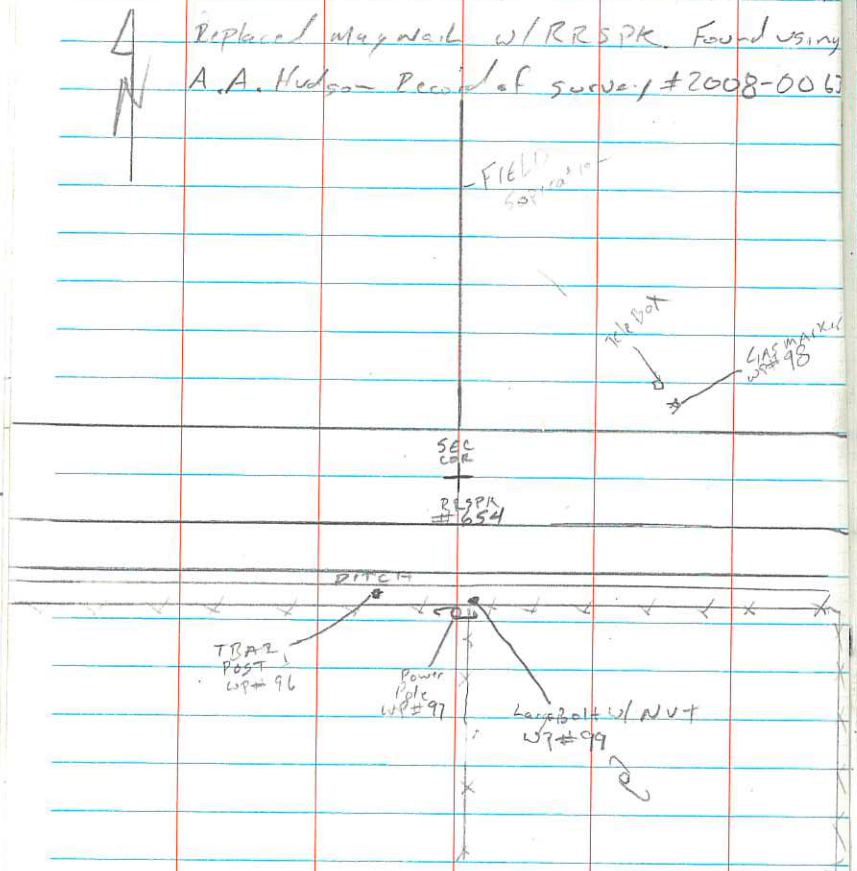

WP#96 IS TBAR POST 40.71 FT S.W of corner


WP#97 IS Power Pole 32.914 FT South of corner

WP#98 IS GAS Marker 72.88 FT N.E of corner

WP#99 IS large Bolt 23.104 FT S.E of corner

#700400

#655 Found A.A. Hudson RR Spk - W/2" Alum CAP, Stamped as S.E corner Sect. 24. held as S.E. corner section 24. SET IN 2004

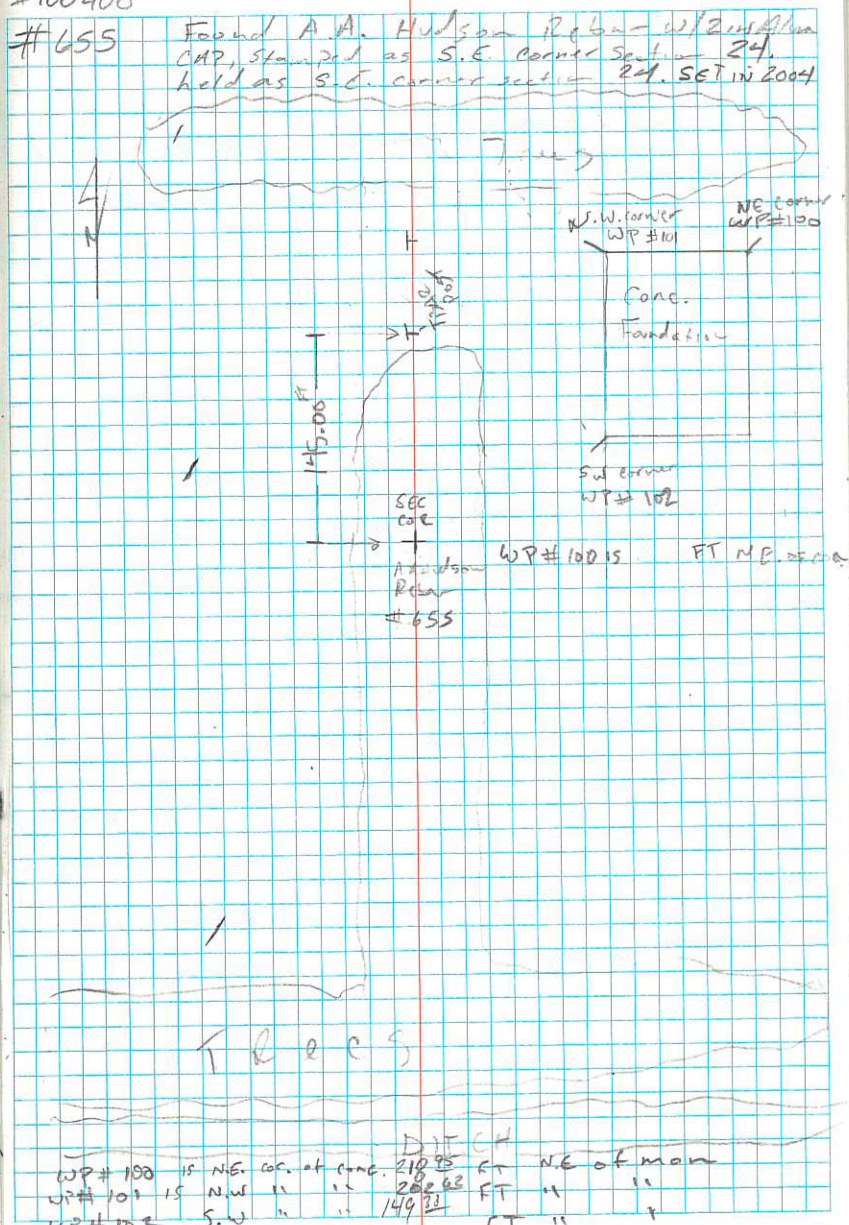

WP#100 IS N.E. cor. of Conc. 21.95 FT N.E of mon

WP#101 IS N.W " " 208.62 FT " "

WP#102 S.W " " 149.33 FT " "


RYAN

9-15-2010

T 14N R 1E

BASE IS AGRC.CMR_PLUS ✓ RICH

PNT #	Desc
#655	3 1/16 T section corner Today due to BAD SATellites.
656 #640800	Found A.A. Hudson Rebar w/ 2" w Alum. CAP marked as North 1/4 corner Section 36. DATE 2004 Held as N 1/4 corner section 36.

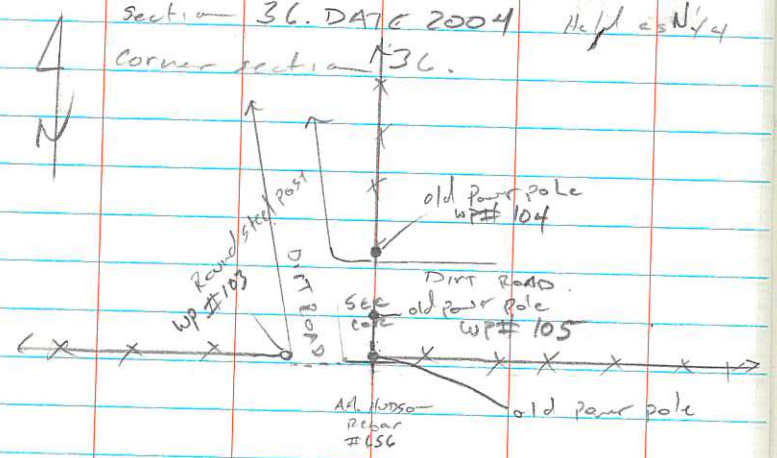

WP #103	IS Steel post 23.22 FT West of mon.
WP# 104	IS old power pole 25.01 FT North of mon.
WP# 105	IS old Power pole 10.83 FT North of mon.


RYAN
9-21-2010

T 14 N R 2 E

BASE AGRC. CAP - PLS ✓ RICH

#657 EAST 1/4 Section 25 Found

#700340 A.A. Hodson Alum. CAP marked EAST 1/4 Section 25 on North Face of slope .5 FT EAST of Fence corner N+S+W.

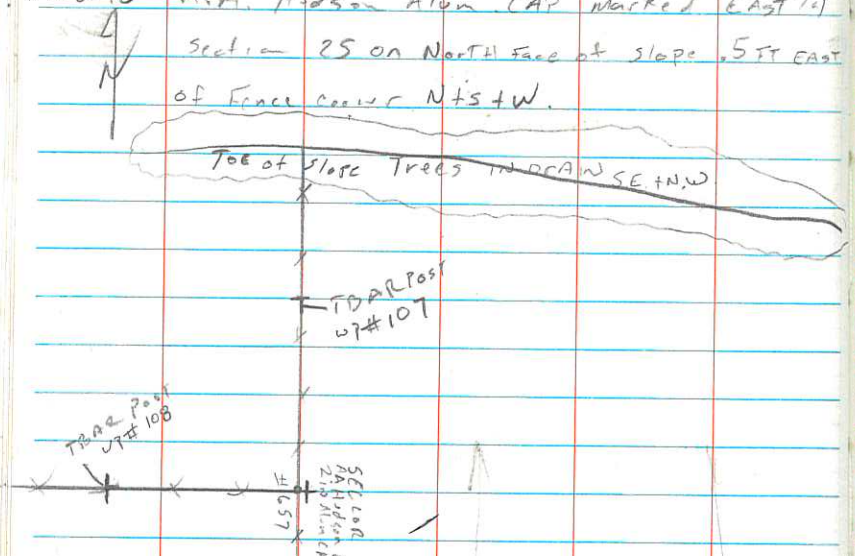

WP#106 is TBAR post 69.764 FT South of monument


WP#107 is TBAR post 113.687 FT West of monument

WP #108 is TBAR Post 12.086 FT North of monument

#600240

#658 West 1/4 Section 25 could not locate Point could have been destroyed.

Reset 2 in Alum. CACHE County CAP & Rebar .5 Ft Below surface 3FT West of Fence N+S using Record of Survey # 2007-0192

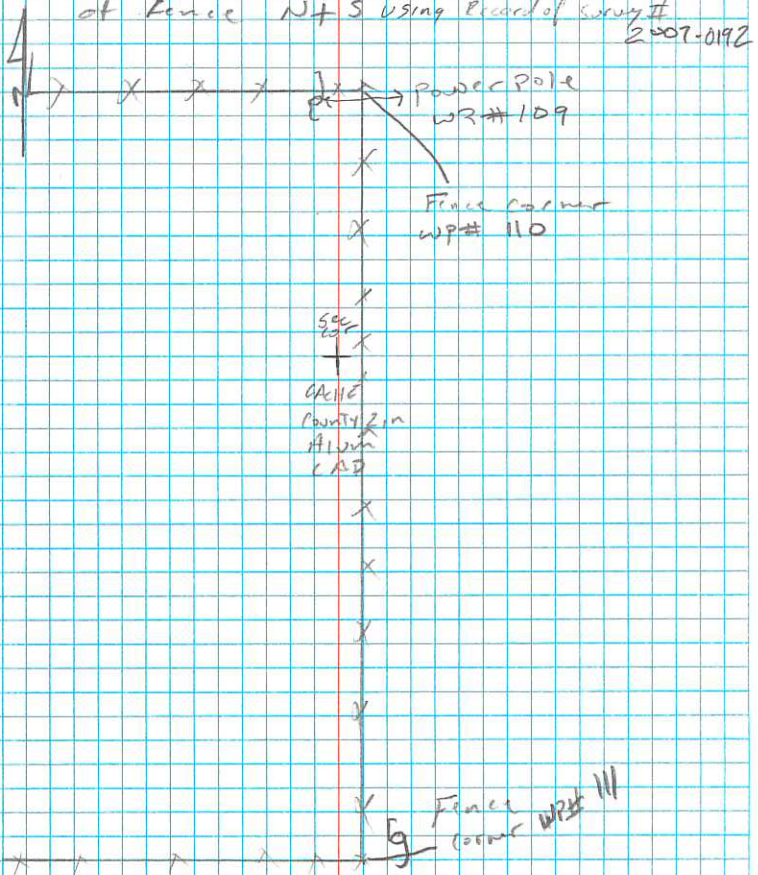

WP#109 is power Pole 66.928 FT N.W. of monument

WP#110 is Fence cor 68.941 FT North of monument

WP#111 is Fence cor 262.28 FT South of monument


RYAN
9-22-2010

T14N R1E


BASE is AGRC CMR Plus ✓ Lewi

PNT #	Desc.
659	EAST 1/4 Section 11 Found A.A. Hudson Rebar w/ 2" Alum. CAP MARKED EAST 1/4 SEC 11 Held as 1/4 corner

#600540

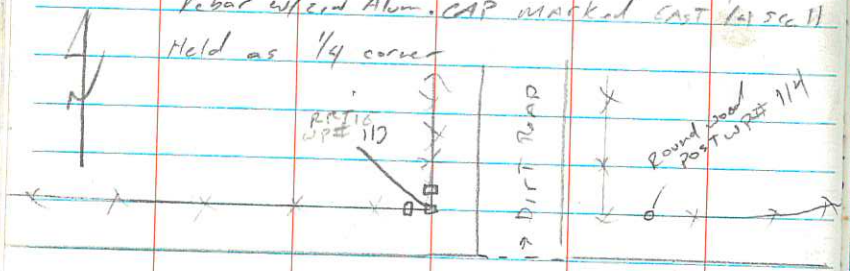

ROAD E+W 13000 NORTH

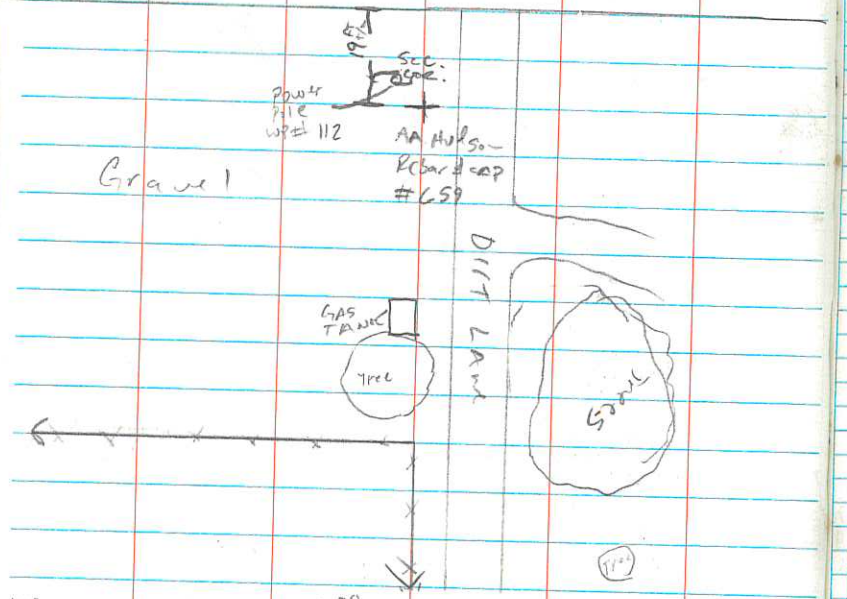


WP 112 is power pole 8.00 FT N.W of monument

WP113 is RETIE 78.80 FT N.W of monument

WP114 is round wood post 130.52 FT N.E. of monument

500540

#660 West 1/4 corner Section 11 Found A.A. Hudson Rebar and CAP in Field .8 FT Below TLA surface marked West 1/4 Sec. 11 Held as corner.

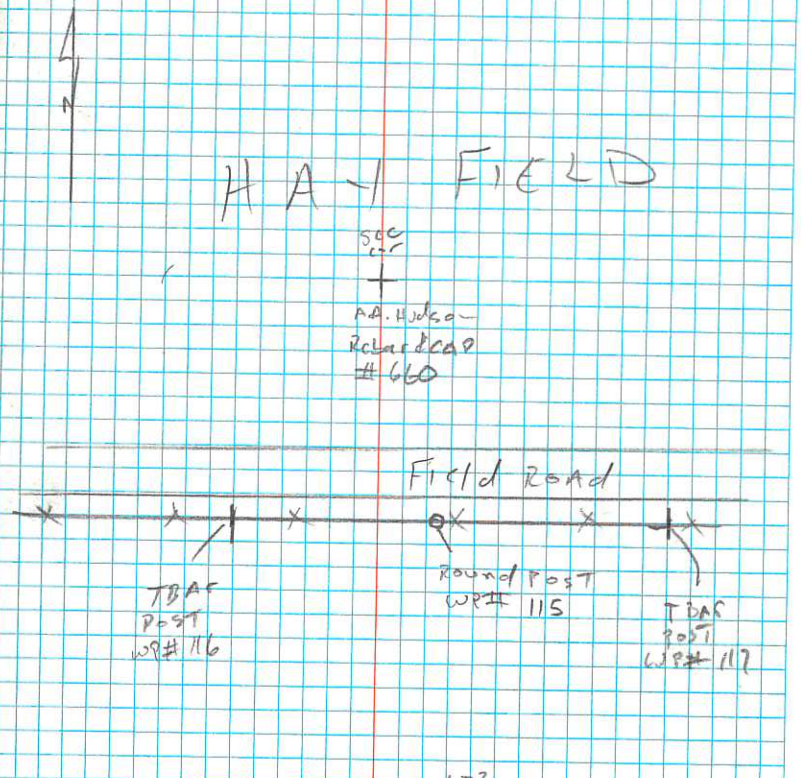

WP# 115 is round post 81.72 FT S.E. of mon.

WP # 116 is TBAR post 91.105 FT S.W. of mon.

WP# 117 is TBAR post 126.784 FT S.E. of mon.


NEXT POINT Number 667

RYAN
9-29-2010

T14N R1E

BASE IS AGEC CMR plus ✓ LEWI

#643 Found NAIL & Flash in Control. at #140400 ROAD E + W Held as SOUTH 1/4 corner of section 18 Replaced NAIL & Flash WITH 2 IN CACHE COUNTY ALUM. CAP

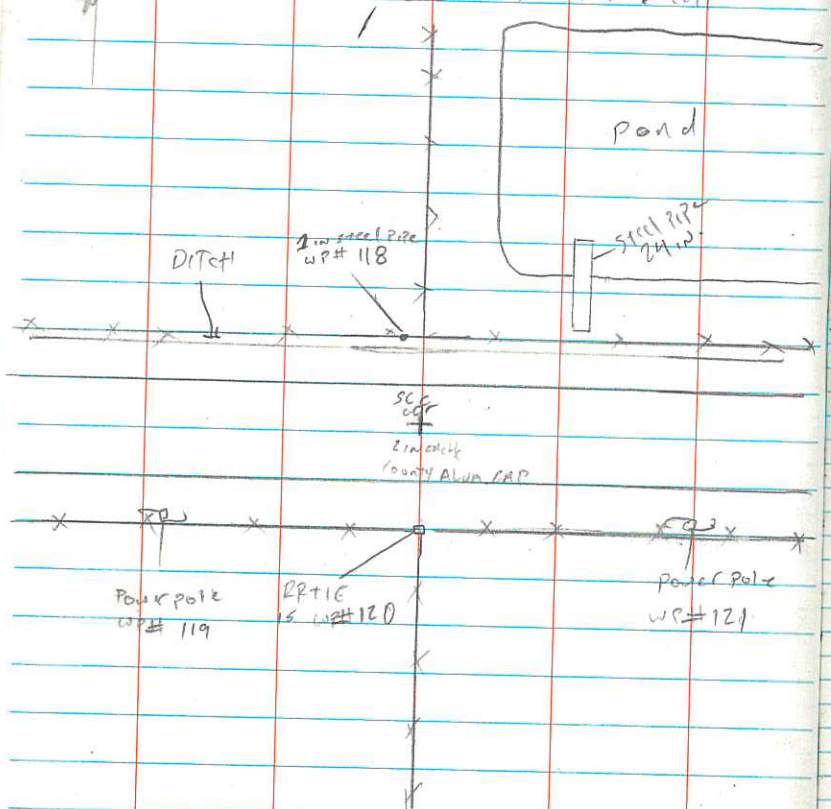

WP # 118 IS steel pipe 46.05 FT N.W. of monument
WP# 119 IS Power Pole 78.22 FT S.W. of monument
WP # 120 IS RR TIE 40.40 FT South of monument
WP # 121 IS Power pole 175.20 FT S.E. of monument


RYAN

10-4-2010

T14N R2E

BASE is AGRC CORS PID VL1491

PNT #		POSC
667	Found	AA Hudson 2 in Alum CAP on rebar
# 500340	marked	EAST 1/4 corner Section 22
	Held as	1/4 Corner

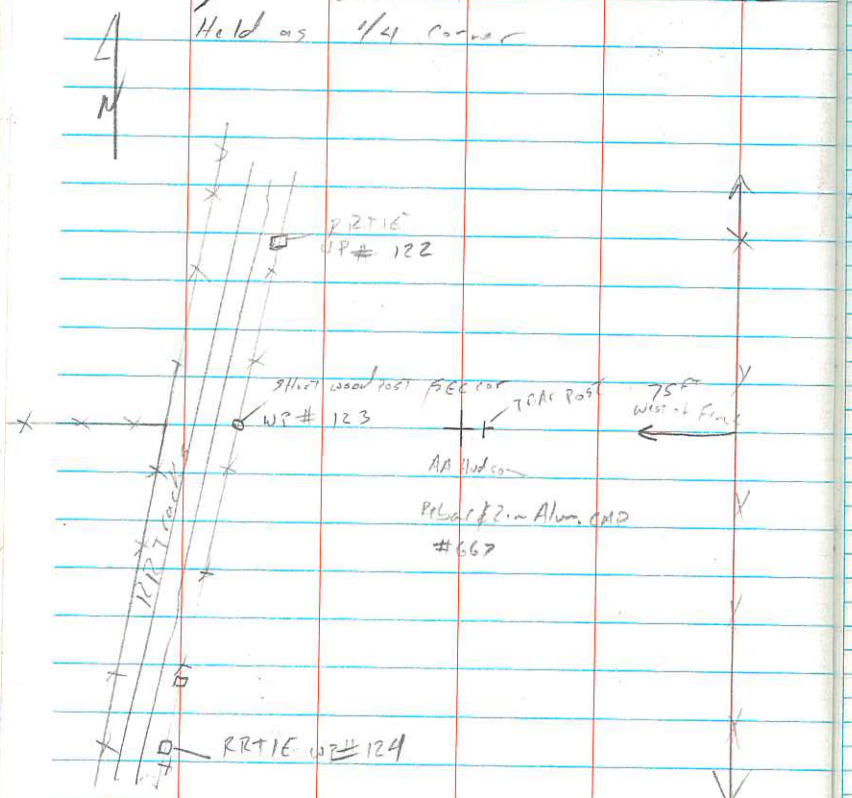


WP# 122 is RRTIE 189.10 FT N.W of monument


WP# 123 is Steel Round post 110.20 FT west of monument

WP# 124 is RRTIE 231.28 FT S.W. of monument

500300

#668 Found RR spk in FIELD .8 FT below surface looked to be at bottom of rebar & Reset Point w/ 2 in Alum. CACHE COUNTY CAP MARKED as N.E corner section 22, 18 cm Below surface using AA. Hudson survey # 08-69 2007-0197A.

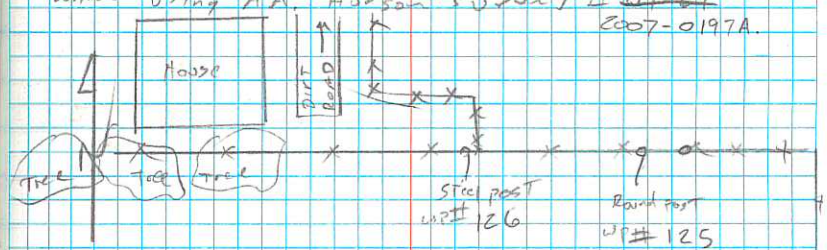



WP# 125 is Round post 366.15 FT N.E. of monument

WP# 126 is Steel post 299.55 FT NE of Monument


RYAN

10-5-2016

T14N R1E

BASE is AGRC cmb plus ✓ RTK

PNT #	Desc.
669	Found AA. Hudson Rebar W/2.in Alum. CAP
#540400	.5 FT Below surface marked as North
	1/4 Section 23. Held as North 1/4 Section 23

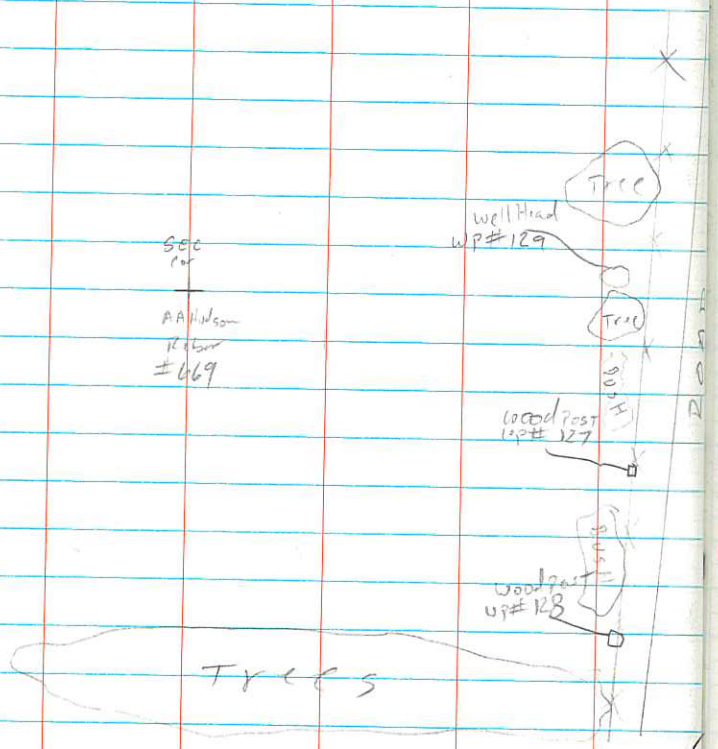


WP#127 is wood post 343.80 FT S.E of monument

WP#128 is wood post 306.24 FT S.E. of monument

WP#129 is well Head 847.32 FT N.E. of monument

#500300

670 found A.A. Hudson Rebar & CAP in Field 18.in Below surface marked SOUTH WEST corner section 23 2005. Held as Section corner.

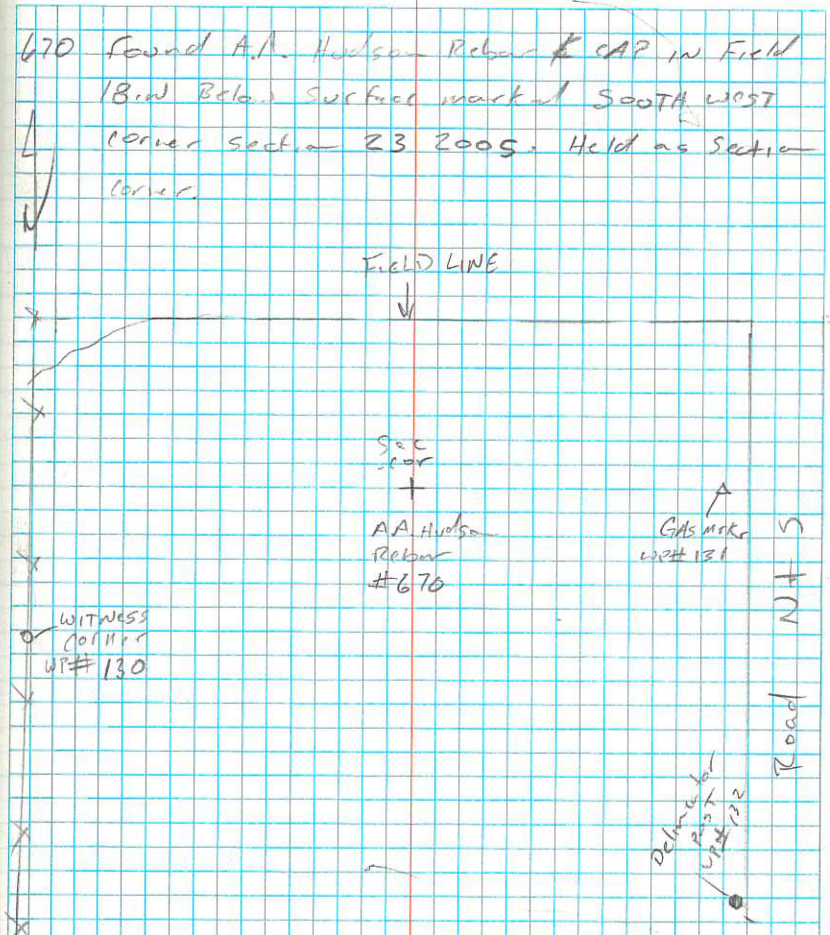

WP# 130 is witness corner 909.13 FT WEST of monument

WP# 131 is GAS Marker 659.00 FT EAST of monument

WP# 132 is delineator post 823.27 FT S.E. of monument

RyAW

10-14-2010

T 14 N R 1 E

RYAN
10-18-2010


BASE is AGRC CMR PLUS V RICH

PNT # DATE:

672 EAST 1/4 Section 24 Found 1/2 IN
#700340 Rebar IN Fence E+W USING MM Hudson
SURVEY # 2006-0006. PUT IN 5/8 IN
Rebar W/2 IN Alum. CAP marked
EAST 1/4 Section 24 Next to 1/2 IN Rebar.

N

TOE of SLOPE

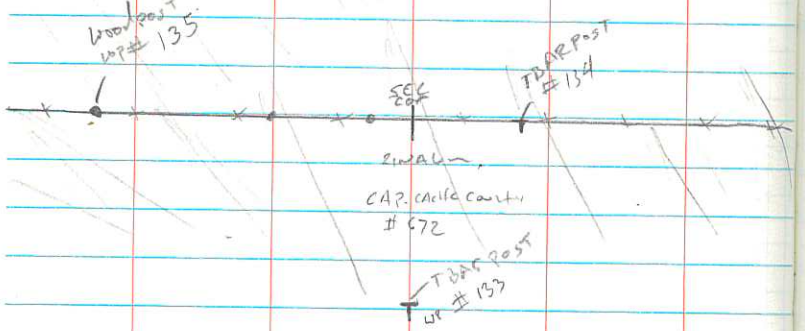


WP # 133 is TBAR POST 71 5/8 FT South of monument
WP # 134 is TBAR POST 40 9/16 FT EAST of monument
WP # 135 is wood POST 10 7/16 FT WEST of monument

T14N R1E

BASE IS AGRC CMR - PLUS ✓ RLH

PNT #	Desc
673	Found 2in Alum cap in mound of stones set by A.A.Hd.
#700440	EAST 1/4 Section 13 set 2005. LS#158372. 3 FT SOUTH of Fence E+W H.I.N as EAST 1/4 corner of Section 13 T14N R1E & West 1/4 Section 18 T14N R2E.

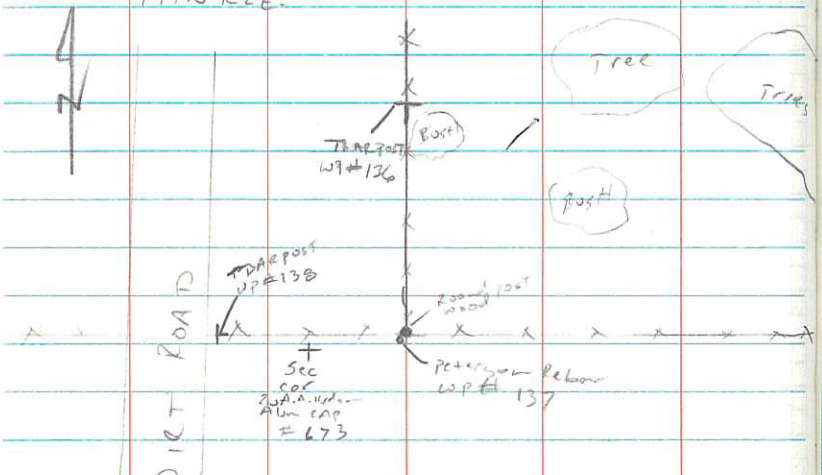

WP#136 IS TBAR POST 72.05 FT N.E. of monument

WP#137 IS Peterson Rebar 50.22 FT EAST of monument

WP# 138 IS TBAR POST 116.30 FT WEST of monument

#700500

#10004

Found Granite stone Clearly marked with 3 Notches on the south edge and 3 Notches on the North edge. For The S.E. Corner of section 13.

Stone is 12 X 16 X 4 Buried 8 in. Deep in small mound of stones 395 FT +/- East of cut off power pole that is being used as a Fence Corner going N+W. on the west face of slope.


RYAN

10-20-2010

T 14N R1E

BASE is AGRC.CM2 Plus ✓ BcH

Point #	desc
10006	Found Black stone tipped over on
#200100	south side of fence E & W & on the west side of old post. Has 5 Notches on the west side & 1 Notch on the east side, most have been turned ground. stone was .3 ft below the ground.
	stone is the S.E. corner of section 31

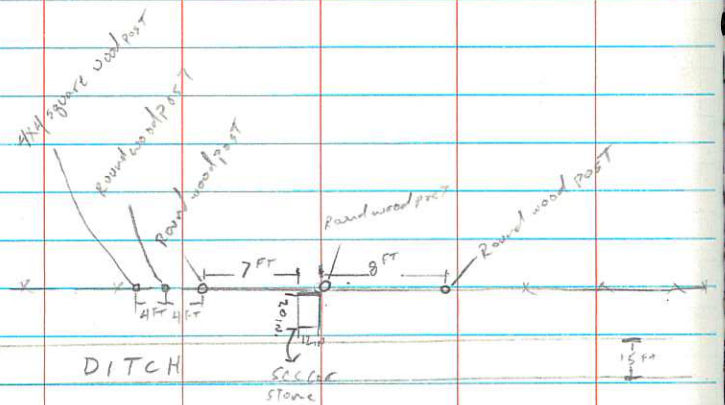

pic # 871 - 876, 1081 & 1082

9-20-1 set 3" Alum monument in place of stone and set stone next to monument. Did 10 min observation.

#300100
#680

Found 5/8 IN Rebar on EAST side of dirt Road N+S shot as S.E. corner Section 32

RYAN

10-27-2010


T14N R1E

RYAN

10-28-2010

BASE is AGRC_CMP_Plus V Lew.

PNT #	Desc.
#675	Found A.A. Hudson Rebar & 2" Alum.
500500	CAP marked SOUTH EAST Corner.
	Section 10. Found Rebar in Field
	1 FT below surface 30 FT± SOUTH
	of Fence E+W. Found using Record
	of survey # 2005-0051.

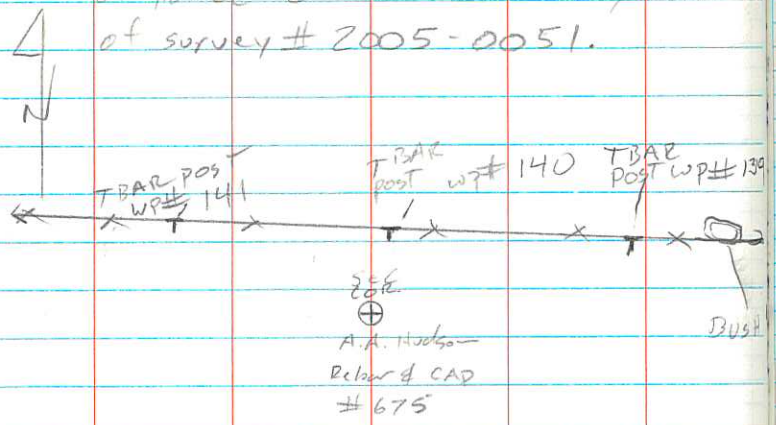

T14N R1E

WP # 139 is TBAR POST 90.26 FT N.E of monument

WP # 140 is TBAR POST 32.10 FT NORTH of monument

WP # 141 is TBAR POST 71.75 FT N.W. of monument

BASE AGRC - CMR. PLUS ✓ Line

PNT #	Desc
674	Found 22SPK in centerline of road E+W. Held as S.E. cor. Sect 3. Needs Ten min. obs. & TIE SHEET to complete location.
#676	Found RESPK in center line of road E+W. Held as North 1/4 section 7. Needs Ten min. obs. & tie sheet to complete.
#677	Found Flint survey Rebar & CAP in Fence corner. E+W+N. Point is Thought to be N. E. corner of Section 4. Needs tie sheet & 10 min. obs. if point is section corner.


RYAN

11-1-2010

T14NR1E

BASE IS AGRC-CMR. PLUS ✓ Lew.

PNT #	Desc.
678	Found A.A. Hudson Rebar with 2in Alum. CAP marked South 1/4 Sec. 10. Point is in the Front Lawn of House #392, 53 FT+/- North of Fence E+W.

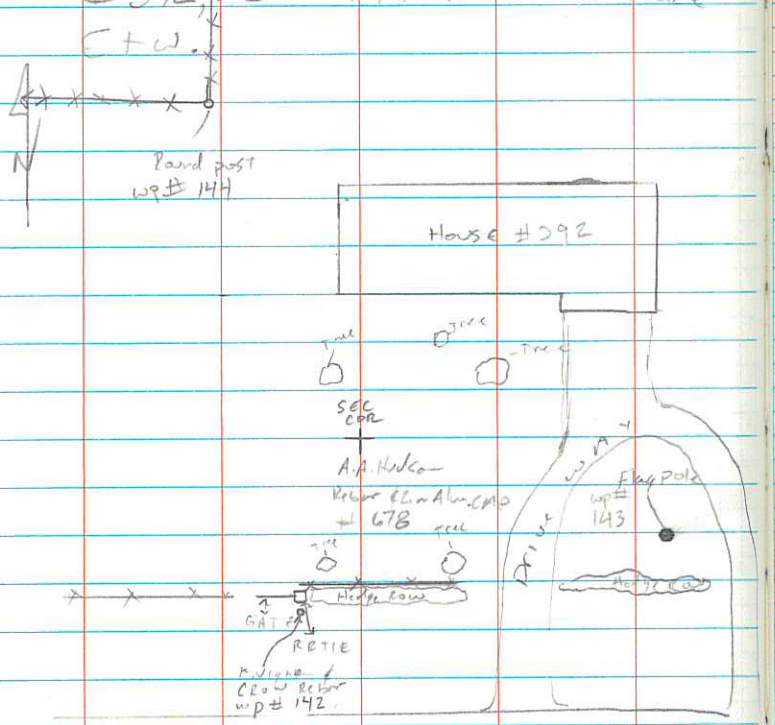

WP# 142	is Knighton & Crow Rebar	34 41	FT S.W. of mon.
WP# 143	is Flag pole	95 60	FT S.E. of mon.
WP# 144	is Round wood post	106 40	FT N.W. of mon.

#679

Found Flint Survey Rebar & CAP on Section Line NEAR The N. 1/4 of section 4. I have not been able to find any Record of Survey for This point


RYAN

11-2-2010

T 14 N R 1 E

BASE is AGRC_CMR_Plus ✓ Level

PNT#	Desc
623	Found MAG NAIL on 8-9-2010. I Found
300640	Record of Surveys THAT Are Holding
	The MAG NAIL as EAST 1/4 Section 5.
	Set 2FT Rebar w/2in ALUM. CAP
	MARKED CACHE COUNTY IN Center
	Line of Road N+S.

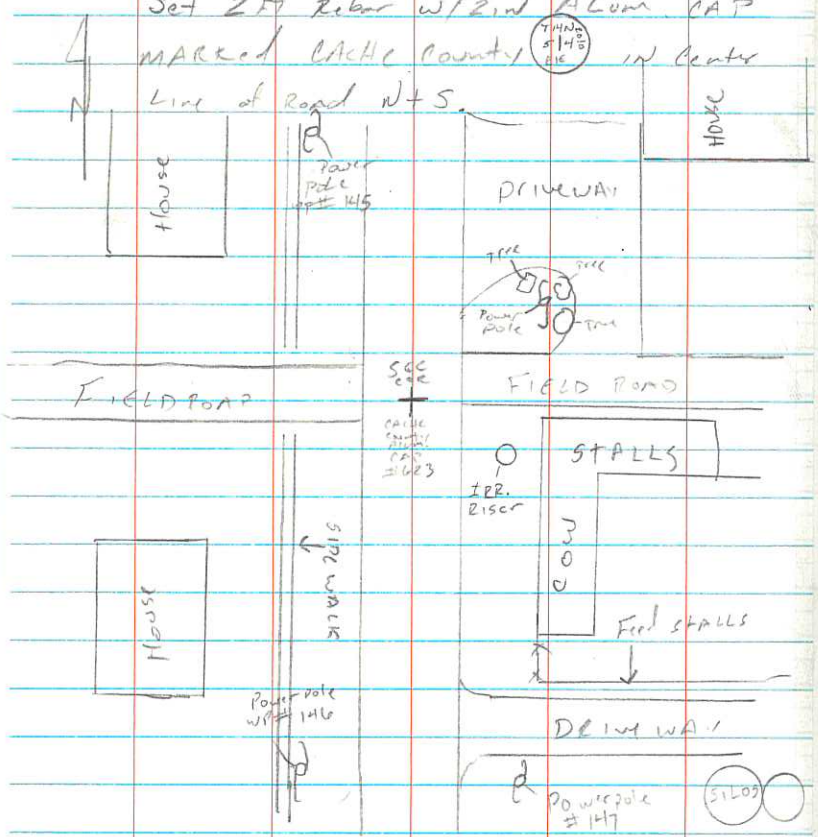

WP# 145 is power pole 133.83 FT N.W. of mon.


WP#146 is Power pole 103.80 FT S.W. of mon.

WP# 147 is Power pole 109.06 FT S.E. of mon.

#605 on NEXT PAGE

#605 Found spindle on 8-9-2010 Thought
200640 to be the EAST 1/4 corner Section 6.
Found using Record of Survey #2010-0015
on 11-2-2010 Set 24" rebar w/2in
Cache county CAP MARKED (T14N R1E 6S 615 PLS). Point is
on west side of Road N+S.

N

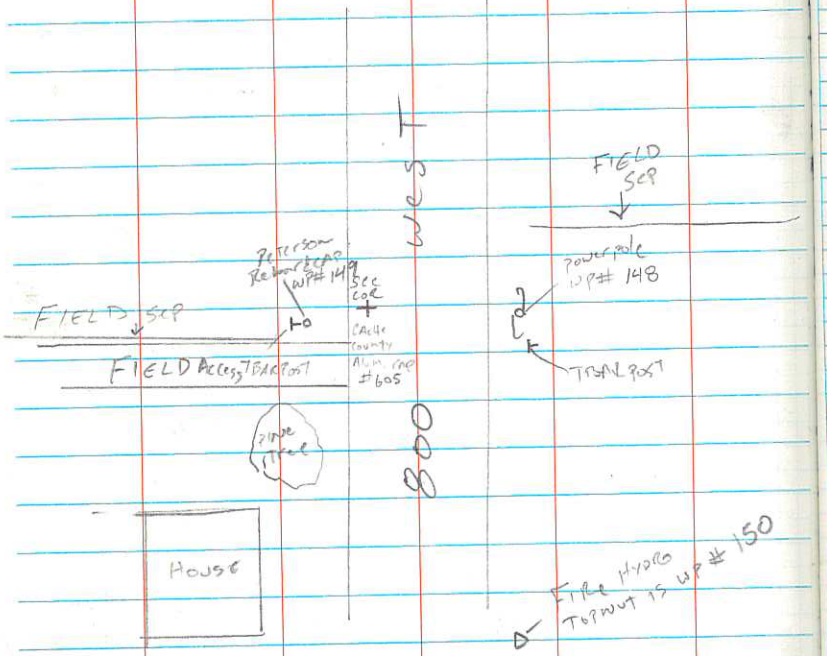

WP# 148 is power pole 29.22 FT S.E of mon.
WP # 149 is Peterson Rebar & CAP 32.95 FT West of mon.
WP # 150 is Top Nut of Fire Hydro 187.86 FT S.E. of mon

RYAN
11-9-2010

T14NR1E

BASE is AGRC CORP - plus ✓ LCW1

PNT #	DESC.
623	Set Rebar w/ Cache County Alum Cap. ON 11-2-2010 I Lost the data ON 11-3-2010. Reshot point & WP's Today 11-9-2010. TIE Sheet is 3 pages BACK.
605	SAME as above. TIE SHeet is 2 pages Back.
679	Took 10 Sec. SHot ON Flint Rebar. North 1/4 Section 4.
678	SAME THing HAPPened as did on points 623 & 605. Point was SHot ON 11-1-2010.

RYAN
11-18-2010

T 14N R 1E

BASE IS AG2C_CM2_PLUS / LEV.

PNT #	DESC.
681	Found 1/2 in Rebar in fence corner N+S+W. NEED TO SET 5/8 in Rebar w/2 in Alum. CAP & do 10 min. obs. to complete. N 1/4 Section 30 T14N R1E

Base is AGRC CMR Plus


Pnt # 677 Antenna height = 5.15

NE corner S4 T14NR1E

N

pic # 1085

1086

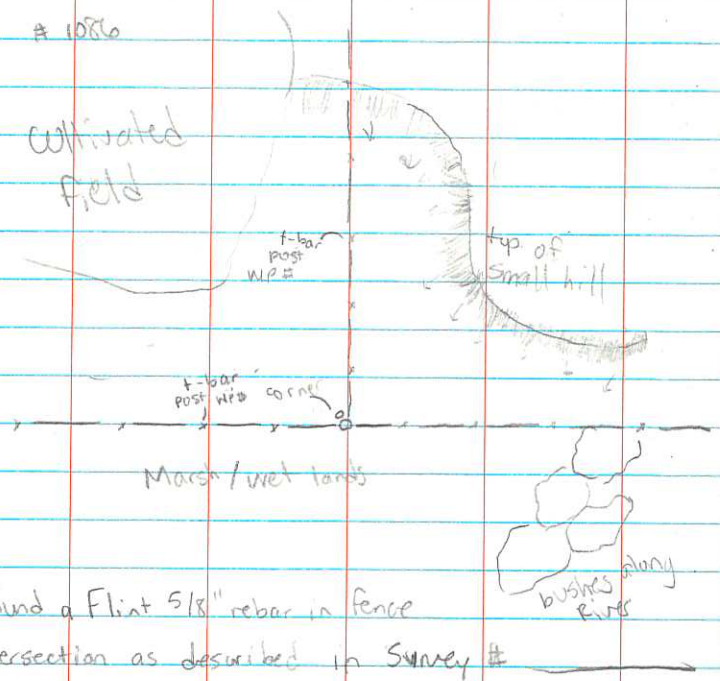

Found a Flint 5/8" rebar in fence intersection as described in Survey # _____ as recorded in the Cache County Surveyor's Office. Accepted this as the NE corner S4T14NR1E. Did 10 min. observation.

RMN
Boad 4
10-3 2011


T 14N R 1E

Basis AGRC_CMR_Plus

640 Set mag dail in CMP on west side of dirt Road using a line between SE corner & NE corner of Section 19 and Fence Going west. E 1/4 Sec 19

pics #1096 1097

Did 10 min observation

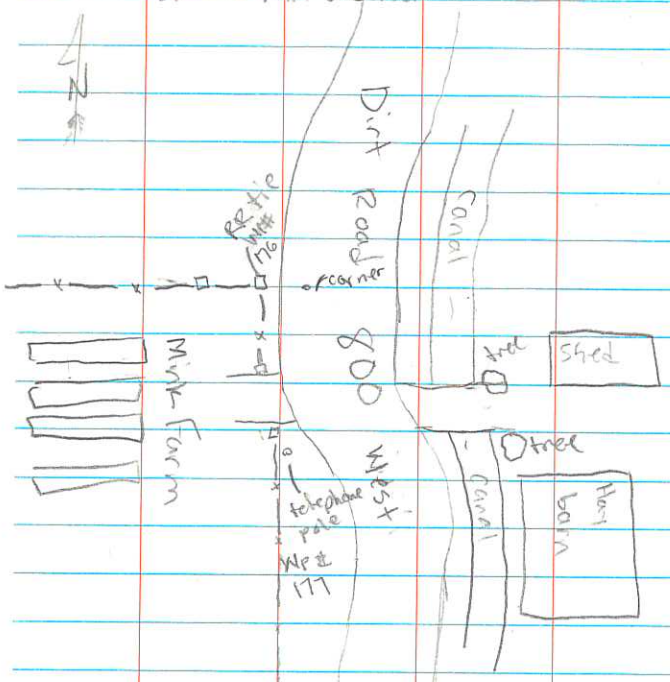


WP #176 RR tie west of corner

WP #177 Telephone pole south of corner on West side of road

PNT # 683 S 1/4 S7 T14N R1E

pic # 1098
1099

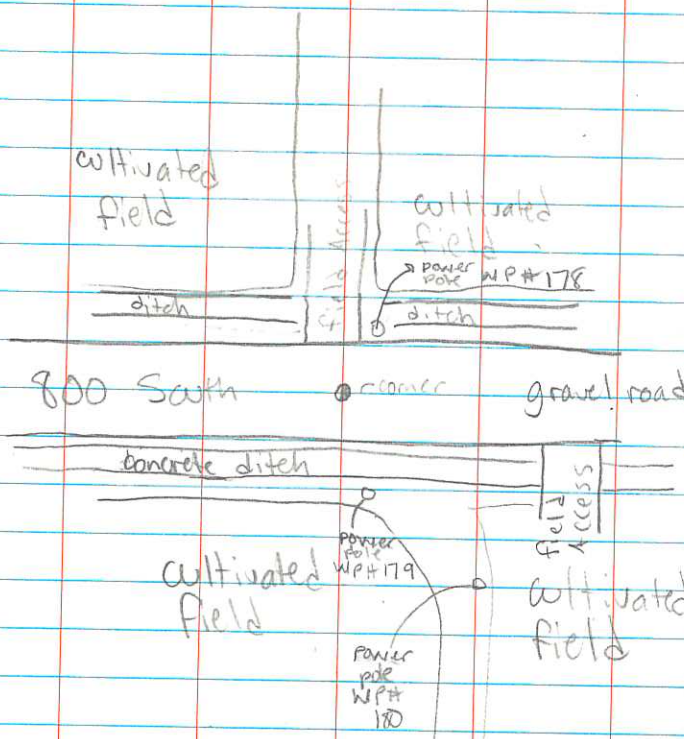

After diligent search, found no existing evidence of corner. Used single proportioning from SE corner S7 and SW S7. Set 2" Alum cap on 5/8" rebar about .2' below surface of gravel road. Did 10 min. observation.


RYAN BRADY 10-24-11

T14N R1E

Base & Meas Comp Plus

~~Pnt #~~ 684


Desc S 1/4 S 32 T14NR1E

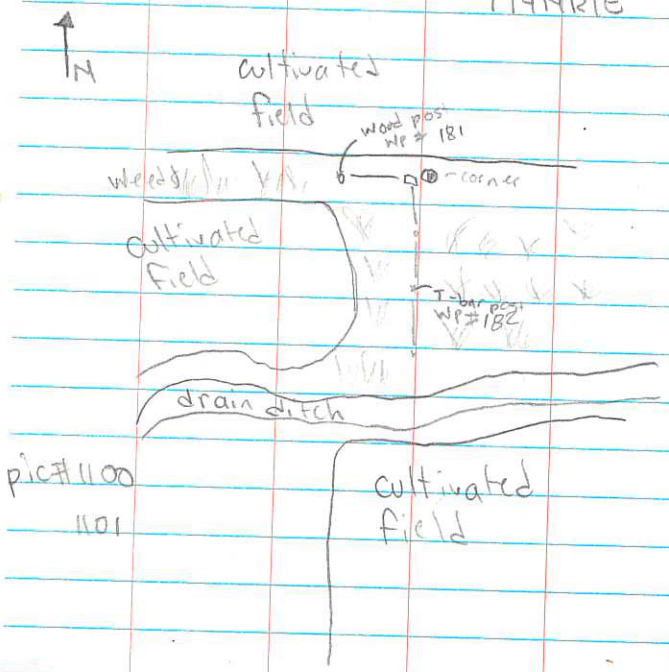

pic# 1100
1101

After extensive search could not find anything. Set corner by using single porportioning and old existing fence corner. Set 3" Alum monument on E side of fence corner. pid 10 min observation.

PNT # 685 DESC S1/4 S31 T14N R1E

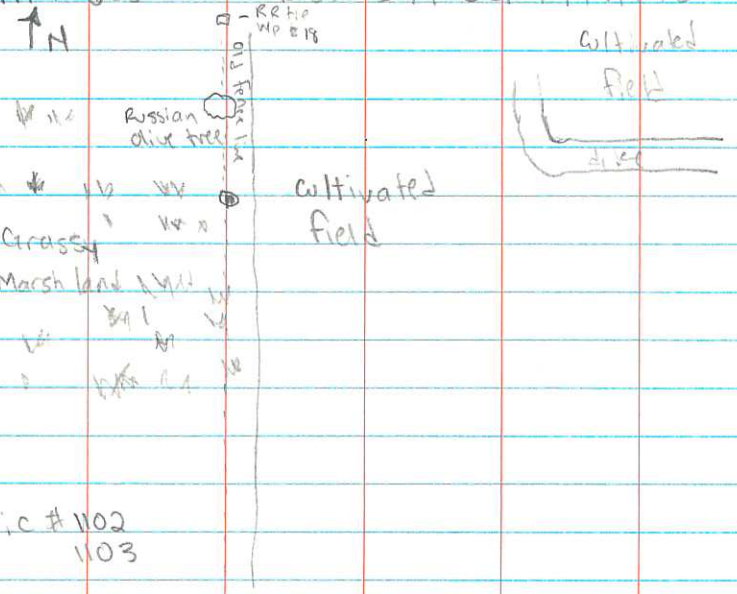

pic # 1102
1103

After diligent search, could find no evidence of corner. Used single porportioning and old fence line running N&S to set corner. Did 10 min observation.

Russian olive tree = 64 ft. North